

SAMYUNG ENC

N700 / NF700 / F700 USER MANUAL



www.samyungenc.com



Industry Canada

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a normal installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1- Reorient or relocate the receiving antenna
- 2- Increase the separation between the equipment and receiver
- 3- Connect the equipment into an output on a circuit different from that to which the receiver is connected
- 4- Consult the dealer or an experienced technician for help
- 5- A shielded cable must be used when connecting a peripheral to the serial ports

Important

It is the owner's sole responsibility to install and use the unit in a manner that will not cause accidents, personal injury or property damage. The user of this product is solely responsible for observing safe boating practices.

Global Positioning System: The Global Positioning System (GPS) is operated by the US government which is solely responsible for its operation, accuracy and maintenance. The GPS system is subject to changes which could affect the accuracy and performance of all GPS equipment anywhere in the world.

Installation: If installation is not correct, the unit can not perform at its designed potential. If in doubt, consult your Samsung ENC dealer. Ensure that any holes made are in a safe position and will not weaken the boat's structure. If in doubt, consult a qualified boat builder.

SAMYUNG ENC DISCLAIMS ALL LIABILITY FOR ANY USE OF THIS PRODUCT IN A WAY THAT MAY CAUSE ACCIDENTS, DAMAGE OR THAT MAY VIOLATE THE LAW.

Governing language: This statement, any instruction manuals, user guides and other information relating to the product (documentation) may be translated to, or has been translated from, another language (translation). In the event of any conflict between any translations of the documentation, the English language version of the documentation will be the official version of the documentation. This manual represents the installation procedures as at the time of printing. Samsung ENC reserves the right to make changes to specifications without notice.

Copyright © 2009 Samsung ENC, Republic of Korea, all rights reserved.

Presentation

Thank you for having purchased a Samsung ENC product. This handbook contains an explanation of how to install, operate and maintain your unit.

SAFETY INSTRUCTIONS



Electronic charts displayed by the chart plotter are believed to be accurate and reliable, but they are not intended to replace official charts which should remain your main reference for all the matters related to the execution of a safe navigation. For this reason we would like to remind you that you are required to carry on board and use the officially published and approved nautical chart.

Please read through this manual before the first operation. If you have any questions, please contact the customer service or your local dealer or distributor. Extensive exposure to heat may result in damage to the chart plotter.

Connection to the power source with reversed polarity will damage the chart plotter severely. This damage is not covered by the warranty.

Do not disassemble. The chart plotter contains dangerous high voltage circuits which only experienced technicians must handle.

Exposure of the display to UV rays may shorten the life of the liquid crystals used in your plotter. This limitation is due to the current technology of the LCD display.

Avoid overheating which may cause loss of contrast and, in extreme case, a darkening of the screen. Problems which occur from over heating are reversible when temperature decreases.

Screen Cleaning Precautions

Cleaning your chart plotter screen is a very important operation and must be done carefully. The following is the cleaning procedure.

You use a tissue or lens tissue and a cleaning spray containing Isopropanol (a normal spray cleaner sold for PC screens). Fold the tissue or lens tissue into a triangular shape, moisten the tip and use the index finger behind a corner to move the tissue across the surface, in overlapping side to side strokes. If the tissue is too wet, a noticeable wet film will be left in its path and you will need to repeat the process. If too dry, the tissue won't glide easily, and may damage the surface.

If you require technical advice or assistance, contact your nearest Samyung ENC office or visit our website, www.samyungenc.com.

1 Introduction

1 Introduction	5
1-1 General Information	9
1-2 Specification	9
1-3 Packing List.....	12
1-4 Optional Accessories.....	12

2 Getting Started

2-1 Mounting the Unit	13
2-1-1 Bracket Mounting	13
2-1-2 Flush Mounting	13
2-2 Keys(Front key , REM-350 Remote)	14
2-3 NAVIONICS Secure Digital (SD) Card	17
2-4 Chart Selection	17
2-5 Simulate Mode	17
2-6 Data Bar.....	18
2-7 Compass	19
2-8 Multi window displays.....	20
2-9 Man overboard (MOB)	22

3 General Operation

3-1 Manual / Auto Power on and off.....	23
3-2 Brightness, night mode and Background.....	23
3-3 The page window	24
 3-4 Chart.....	26
3-4-1 Chart window	26
3-4-2 Latitude and longitude.....	27
3-4-3 Chart scale	27
3-4-4 Finding a chart symbol	27
3-4-5 S-Map search	28
3-4-6 Chart symbols and information	28
3-4-7 Introduction to navigating.....	28
3-4-8 Going to a waypoint or to a point on the chart	29
3-4-9 Following a route	29
3-4-10 Goto Key	29
3-4-11 Distance and bearing calculator	30
3-4-12 Projected course	30
3-4-13 Finding a Char Symbol	30
3-4-14 Tracks Settings in the Chart window	31
 3-5 Sonar	32
3-5-1 Interpreting the display	32
3-5-2 Mode	32
3-5-3 Single and Dual frequency fish finding	33
3-5-4 Range.....	33
3-5-5 Gain	34

	3-5-6 Sonar window display.....	35
	3-5-7 No split.....	35
	3-5-8 Split zoom and Full Screen zoom.....	36
	3-5-9 Split bottom.....	36
	3-5-10 Split 50/200.....	37
	3-5-11 Split A-Scope.....	37
	3-6 Highway.....	38
	3-7 Gauges.....	38
	3-8 Waypoints.....	39
	3-8-1 Creating a new waypoint.....	39
	3-8-2 Moving a waypoint.....	39
	3-8-3 Editing an existing waypoint.....	39
	3-8-4 Deleting a waypoint.....	40
	3-8-5 Find a waypoint.....	40
	3-8-6 Sort Waypoints.....	40
	3-8-7 Deleting all waypoints.....	40
	3-9 Routes.....	41
	3-9-1 Managing a route from the chart window.....	41
	3-9-2 Managing a route from the route window.....	42
	3-10 Satellites.....	43
	3-10-1 Satellite information.....	43
	3-11 Tides.....	44
	3-12 AIS.....	45
	3-12-1 Viewing AIS Vessels.....	45
	3-12-2 AIS Windows.....	45
	3-13 DSC.....	47
	3-13-1 distress.....	47
	3-13-2 Poll.....	48
	3-14 NAVTEX.....	49
	3-15 Engine Faults.....	49

4 Advance Settings

	4-1 System Configuration Settings.....	50
	4-1-1 Language.....	50
	4-1-2 Chart Selection.....	50
	4-1-3 Beep volume.....	50
	4-1-4 Auto power.....	50
	4-1-5 Features.....	50
	4-1-6 Factory reset.....	50
	4-1-7 About.....	50
	4-2 Chart Settings.....	51
	4-2-1 Rotation.....	51
	4-2-2 Palette.....	51
	4-2-3-1 General (NAVIONICS).....	51
	4-2-3-2 General (S-MAP).....	52
	4-2-4-1 Land & Sea (NAVIONICS).....	52
	4-2-4-2 Land & Sea (S-MAP).....	52

	4-2-5 Map datum.....	52
	4-2-6 NMEA datum offset	53
	4-2-7 Map shift.....	53
	4-2-8 Restore default	53
	4-3 Sonnar Settings	54
	4-3-1 Frequency	54
	4-3-2 Palette.....	54
	4-3-3 Scroll speed.....	54
	4-3-4 Digit size.....	54
	4-3-5 Fish	54
	4-3-6 Advance Settings	54
	4-3-7 Restore default	54
	4-4 GPS Settings	55
	4-4-1 GPS Source	55
	4-4-2 DGPS Source	55
	4-4-3 Static Navigation.....	55
	4-4-4 Speed Filter and Course Filter.....	55
	4-4-5 Lat/Lon d.p's	55
	4-4-6 Ship speed	55
	4-4-7 Magnetic Variation	55
	4-5 Track & Log Settings	56
	4-5-1 Track	56
	4-5-2 Logs	56
	4-6 Memory Settings.....	57
	4-6-1 Save.....	57
	4-6-2 Load.....	57
	4-6-3 Delete.....	57
	4-6-4 Format.....	58
	4-6-5 Screen snap shot	58
	4-7 AIS Settings	58
	4-7-1 Display filter	59
	4-7-2 Alarm option.....	59
	4-7-3 Display options	59
	4-7-4 Restore default	59
	4-8 Alarms	60
	4-8-1 Fish	60
	4-8-2 Deep	60
	4-8-3 Shallow.....	60
	4-8-4 Temperature.....	60
	4-8-5 Temperature rate	60
	4-8-6 Low battery	60
	4-8-7 Navigation alarms	60
	4-8-8 AIS.....	60
	4-8-9 DGPS.....	60
	4-8-10 Restore default	60
	4-9 Others.....	61
	4-9-2 Waypoint	61
	4-9-3 GPS	61
	4-9-4 Units.....	61
	4-9-5 Comms	61
	4-9-6 Calibrate	61
	4-9-7 Time.....	61

4-9-8 Restore default	61
4-9-9 Calendar	61

5 INSTALLATION

5-1 Options and Accessories	62
5-2 Connections	63
5-3 Power/data cable	63
5-4 GPS antenna	64
5-4-1 antenna	64
5-4-2 The antenna using NMEA.....	64
5-5 NMEA 0183	65
5-6 NMEA 2000	66
5-7 Sonar Transducers	67
5-8 Setup and test.....	68

1 Introduction

1-1 General Information

The chart plotter is a precision-crafted GPS chart Plotter with high-performance receiver for the Global Positioning System constellation of satellites, providing precise location data with a host of navigation features. Some functions require optional units and sensors installed on your boat.

The chart plotter can be connected to external devices with NMEA0183 and NMEA2000 interface and display information. Following are the examples.

- NAVTEX
- AIS receiver
- DSC VHF radio
- Transducer & sensors
- Autopilot

1-2 Specification

[NF700][N700]

GENERAL	
Category	Detail
Size	205 mm(W) x 171 mm(H) x 75 mm(D)
Display	7" diagonal, TFT color, 800 x 480 pixels.
Supply voltage	10 to 32 V DC
Supply current	13.8 V 400 mA min - no backlighting. 600 mA max - full backlighting.
Operating temperature	-10° to 50°C
ALARMS	
User set: Arrival radius, anchor, XTE, danger, too shallow, too deep, fish, temperature, temperature rate, low battery, loss of DGPS fix, dangerous AIS vessels.	
GPS NAVIGATION	
Chart card	NAVIONICS SD Card
User card	SD Card
Waypoints	Up to 10,000, with default or user defined alphanumeric names up to eight characters.
Routes	100 Routes, with up to 100 points each
Tracks	By time or distance, 10 track of 15,000 points
Chart datums	216 Chart datums, One user-defined map shift.
Chart scale	0.2 to 500 nm for chart (chart dependent) down to 0.005 nm in plotter mode.
COMMUNICATIONS	
NMEA	NMEA 0183 4800, 9600, 38400 baud, NMEA 2000
NMEA 0183 Inputs from compatible instruments	DBK, DBS, DBT, DPT, GGA, GLL, GNS, GGA, GSV, HDG, HDT, MDA, MTA, MTW, MWD, MWV, RMC, RPM, VHW, VTG, VWT, ZDA
NMEA 2000 Inputs from compatible instruments	System date and time(PGN126992),Vessel Heading(PGN127250),Engine parameters/Rapid Update(PGN127488), Engine parameters/Dynamic(PGN127489),Trip parameters/Engine(PGN127497),Engine parameters/Static(PGN127498),Fluid level(PGN127505),Water Speed(PGN128259),Water depth(PGN128267),Position/Rapid Update(PGN129025),COG & SOG/Rapid Update(PGN129026),GNSS Position Data(PGN129029),GNSS DOPs(PGN129539),GNSS Sats in View(PGN129540),Wind Data(PGN130306),Environmental Parameter-Water temp(PGN130310),Environmental Parameter(PGN130311)
NMEA 0183 Outputs, for compatible instruments	APA, APB, BWR, GGA, GLL, GSA, GSV, RMB, RMC, VTG, XTE, DBT, DPT, MTW, VHW, XDR
NMEA 2000 Outputs, for compatible instruments	Water Speed(128259), Water depth(128267), XTE(129283), NAV. data(129284), NAV. data(129285), COG & SOG(129026), GNSS position(129029), Water temp.(130310)
SONAR FISHFINDING	[N700] doesn't have below function
Depth range	0 m to 600 m
Sonar output	Power: Variable, up to 600 W RMS Dual frequency: 50 khz and 200 khz
Temperature	Range 0° to 37.7°C (32°F to 99.9°F) Resolution of 0.1° unit.
Speed (from paddlewheel transducer)	1 to 96.6 kph (57.5 mph, 50 kn).

[F700]

GENERAL	
Category	Detail
Size	205 mm(W) x 171 mm(H) x 75 mm(D)
Display	7" diagonal, TFT color, 800 x 480 pixels.
Supply voltage	10 to 34 V DC
Supply current	13.8 V 400 mA min - no backlighting. 600 mA max - full backlighting.
Operating temperature	-10° to 50°C
ALARMS	
User set: Arrival radius, anchor, XTE, danger, too shallow, too deep, fish, temperature, temperature rate, low battery, loss of DGPS fix, dangerous AIS vessels.	
COMMUNICATIONS	
NMEA	NMEA 0183 4800, 9600, 38400 baud, NMEA 2000
NMEA 0183 Inputs from compatible instruments	DBK, DBS, DBT, DPT, GGA, GLL, GNS, GGA, GSV, HDG, HDT, MDA, MTA, MTW, MWD, MWV, RMC, RPM, VHW, VTG, VWT, ZDA
NMEA 2000 Inputs from compatible instruments	System date and time(PGN126992), Vessel Heading(PGN127250), Engine parameters/Rapid Update(PGN127488), Engine parameters/Dynamic(PGN127489), Trip parameters/Engine(PGN127497), Engine parameters/Static(PGN127498), Fluid level(PGN127505), Water Speed(PGN128259), Water depth(PGN128267), Position/Rapid Update(PGN129025), COG & SOG/Rapid Update(PGN129026), GNSS Position Data(PGN129029), GNSS DOPs(PGN129539), GNSS Sats in View(PGN129540), Wind Data(PGN130306), Environmental Parameter-Water temp(PGN130310), Environmental Parameter(PGN130311)
NMEA 0183 Outputs, for compatible instruments	DBT, DPT, MTW, VHW, XDR
NMEA 2000 Outputs, for compatible instruments	Water Speed(128259), Water depth(128267), Water temp.(130310)
SONAR FISHFINDING	
Depth range	0 m to 600 m
Sonar output	Power: Variable, up to 600 W RMS Dual frequency: 50 khz and 200 khz
Temperature	Range 0° to 37.7°C (32°F to 99.9°F) Resolution of 0.1° unit.
Speed (from paddlewheel transducer)	1 to 96.6 kph (57.5 mph, 50 kn).

1-3 Packing List

Item List	Part number	Model		
		N700	F700	NF700
Display	N700-E	0	0	0
Bracket	N700-DB	0	0	0
Display Cover	N700-CC	0	0	0
Power Cable	LTW-1750-8 LTW-2000-8	0	0	0
Bracket mounting screw	N700-BP	0	0	0
GPS Antenna + GPS Antenna Support	SAN-60-10M	0	X	0
Protection Cover	N700-CB	0	0	0
User's Manual(Eng)	N700-ME	0	0	0
B45 Transducer	B45	X	0	0

1-4 Optional Accessories

Model	Part number	Item List
GPS Antenna + GPS Antenna Support	SAN-60-20M	GPS antenna + BNC Plug
		GPS antenna support
		GPS antenna cable(10m)
GPS Antenna Stand type Support	57745	GPS Antenna Stand type Support
Y cable	NF700-YC	Y cable(see section 5-8)
P58 Transducer	P58	Option
P39 Transducer(NMEA 2000)	P39	Option(for only N700)

2 Getting Started

2-1 Mounting the Unit


The chart plotter is supplied with bracket and flush mounting kit. You can choose a method of installation according to your preference.

2-1-1 Bracket Mounting

Before installing ensure the area the bracket is mounted to is strong enough to support the weight of the GPS chart plotter. After the location is found, attach the mounting base to the area using the supplied hardware.

Mounting the display Unit:

- 1 Hold the display unit and find a groove joint between the display unit and bracket.
- 2 Gently push the display unit into the groove of bracket and turn the knob to clockwise to lock

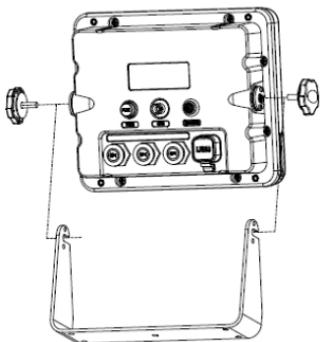

Removing the display unit:

- 1 Turn the unit off
- 2 Turn the knob to counter clockwise
- 3 Pull the display unit out.

Note

The chart plotter with internal GPS antenna is designed to be bracket mounting and flush mounting. However, if you flush mount inside of your boat, GPS performance can be reduced.

2-1-2 Flush Mounting


- 1 Find a location for flush mounting.
- 2 Drill a hole in the area of the cutout area for the blade of jig saw.
- 3 insert and cut out the area on the panel using the jig saw
- 4 Drill four holes for mounting studs.
- 5 Install the mounting studs on the chart plotter and insert them into the mounting hole.
- 6 Attach the chart plotter to the mounting location by attaching the supplied hardware to the mounting studs.

Note


- 1 If you flush mount, you need the optional external GPS antenna.
- 2 Before Drilling holes make sure there is enough space to mount the chart plotter there is no obstructions.

2-2 Keys


[F700]

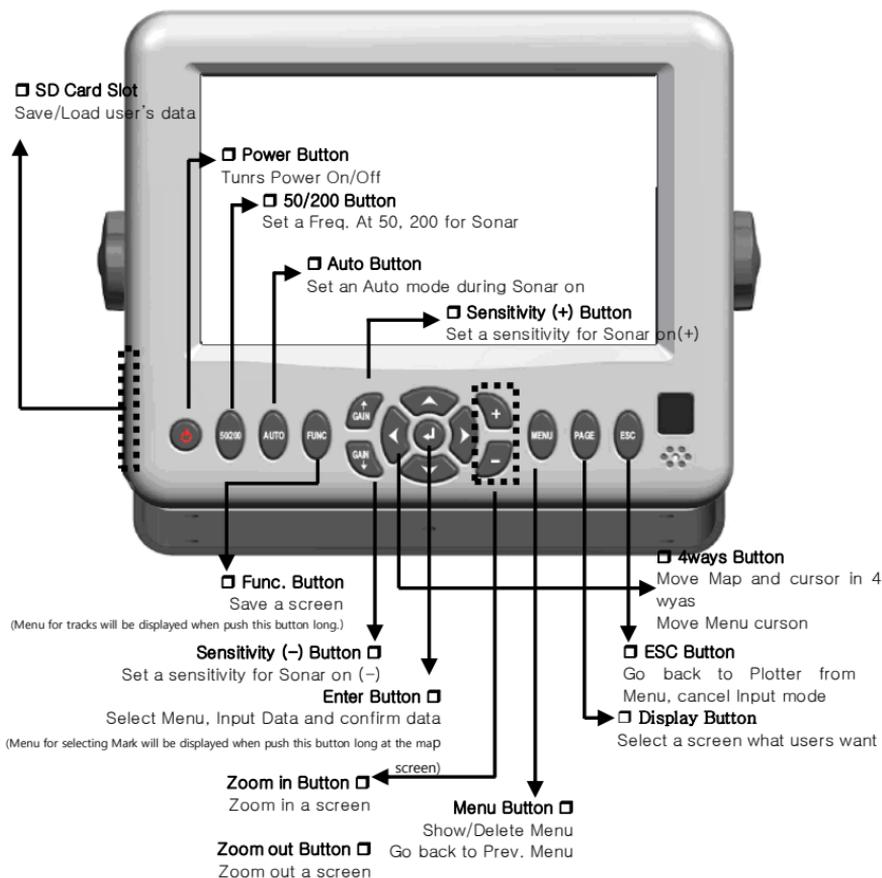

[NF700][N700]

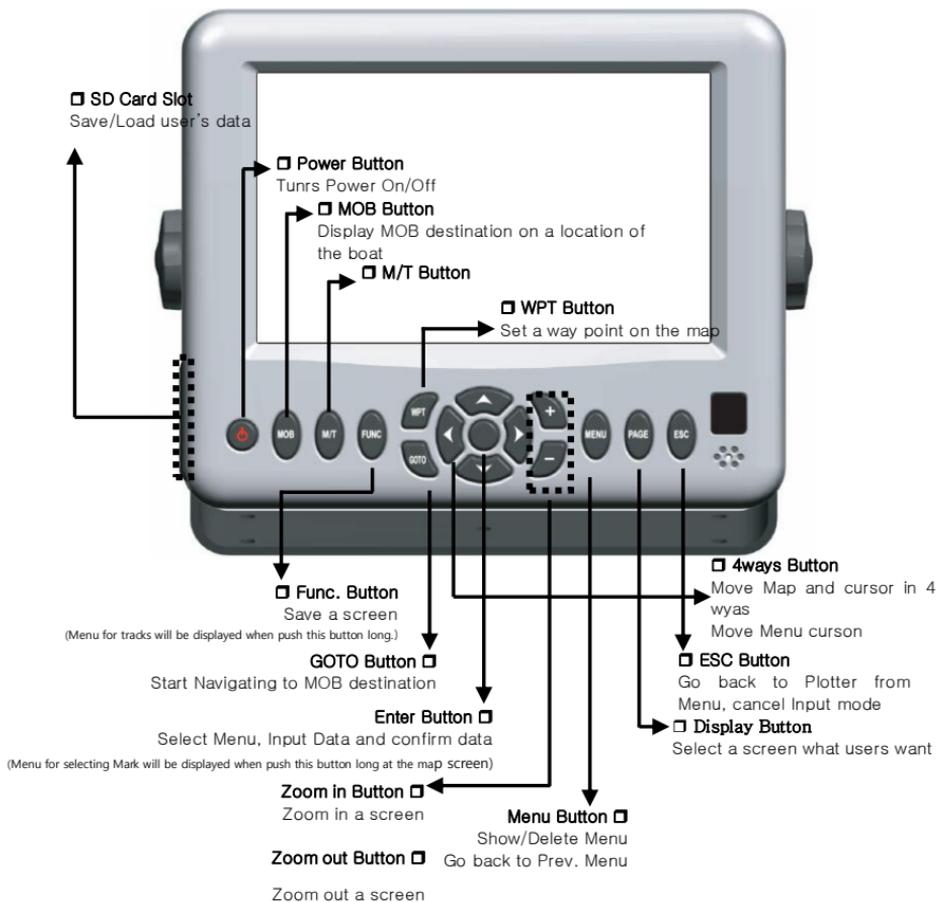

[REM-350]

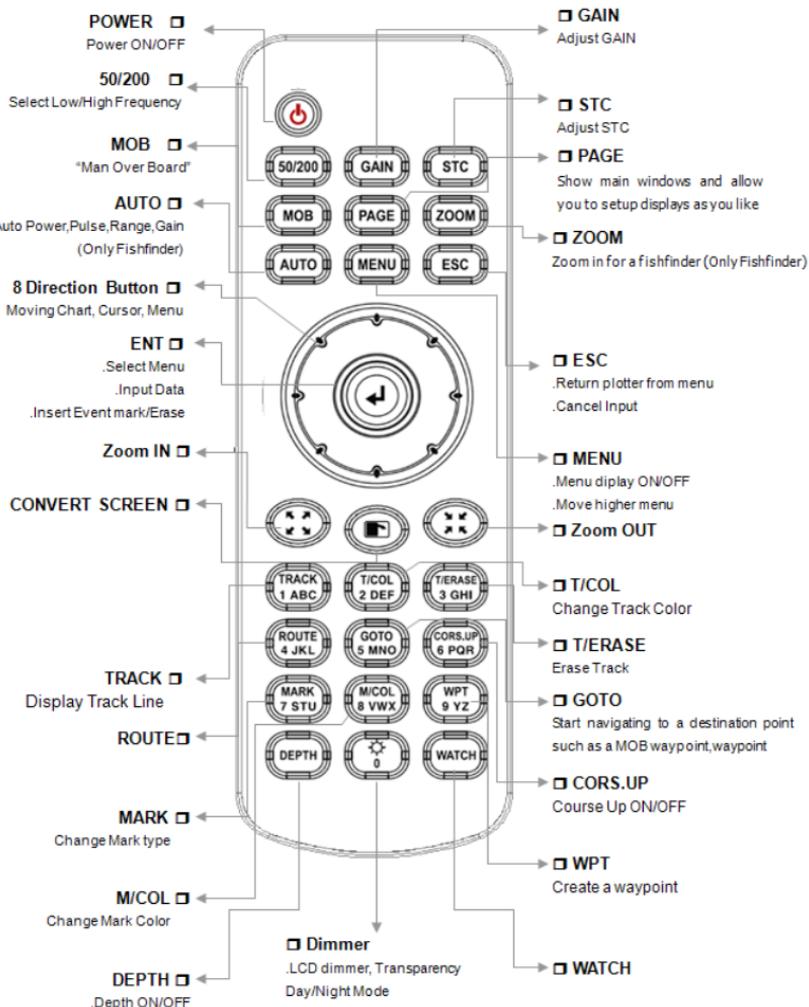

※ Remote control(REM-350) is Option device

2-3 NAVIONICS Secure Digital (SD) Card


This section provides instructions for inserting and removing NAVIONICS SD card procedure.

Inserting the SD Card

- 1 Grab a card before inserting as NAVIONICS label heading down
- 2 Open the door, gently push the SD card into the slot; push the SD card in as far as you hear click sound, then close door.

Removing the SD Card

- 1 Turn off the unit.
- 2 Open the door and push in on the SD card until it is released.
- 3 Close the door.

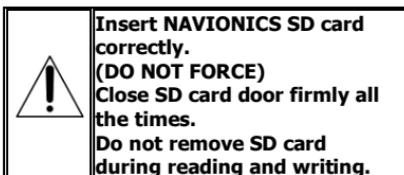


2-4 Chart Selection

A user can select a map between NAVIONICS and S-MAP.

Chart Selection

- 1 Press and hold .
- 2 Select the system setting icon.
- 3 Select Chart then a chart you prefer.

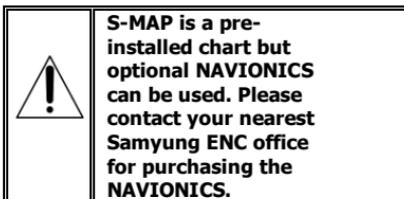


2-5 Simulate Mode

Simulate Mode is great for practicing the actual use of a product when the satellites signals and internal alarms are not available. In the simulate mode, the unit turns the GPS receiver off and ignores data from all optional devices.

Two simulate modes are available as below.

- **Normal:** Allows a user to practicing the actual use of a product without satellites connection.
- **Demo:** boat travel alone given route at given speed and show different function of the unit.

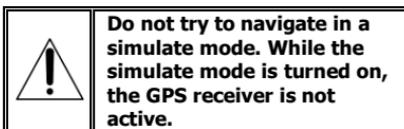

2-6 Data Bar

Data bar displays useful navigation information at the top of the display.


10	150	160	170	S	190	200	210	220	230
47° 41.636'N					003° 22.169'W				
COG 187					SOG 5.6 kn				
Air 68.3					FTRP ----- nm				

Displaying Data bar

- 1 Press **MENU** and select **Data bar**.
- 2 Select **Data bar**.

Setting the data displayed in data bar

- 1 Press **MENU** and select **Data bar**.
- 2 Select **Data bar** then **Data bar setup**.
- 3 Move the cursor key to highlight the data field you want to change then press **ENTER**.
- 4 Select **Data type**.
- 5 Select a desired data you want to display in the field then press **ENTER**.
- 6 Repeat above steps if necessary.

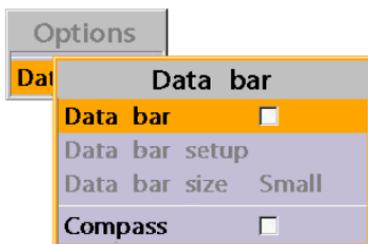

Selecting the Data bar size

- 1 Press **MENU** and select **Data bar**.
- 2 Select **Data bar** then **Data bar size**.
- 3 Select the desired size of data bar.

[Large]

47° 41.415'N					003° 22.238'W				
COG 194					SOG 4.1 kn				
Air 50.2					FTRP ----- nm				

[Small]

47° 41.238'N					003° 22.289'W				
COG 187					SOG 5.9 kn				
Air 52.6					FTRP ----- nm				

Tip: If you select None for all data fields, the data bar will disappear to save space for the chart.


Tip: Even though you setup a data bar for specific window, the data bar is not apply to all other window.

2-7 Compass

The chart plotter computes compass direction from the constellation of GPS satellites. For the GPS chart plotter to compute direction the vessel must be moving through the water.



For easy reading and recognition, there is a compass needle at top right side.



When the compass is displayed, COG is always displayed in data field.

Also when you are navigating to a point, COG and BRG is always displayed in data bar.




Tip

COG(Course Over Ground) – The course you vessel is heading.

BRG(Bearing) – The direction from your current position to a destination point.

To turn the compass off or on:

- 1 Press **MENU** and select **Data bar**.
- 2 Select **Compass**.

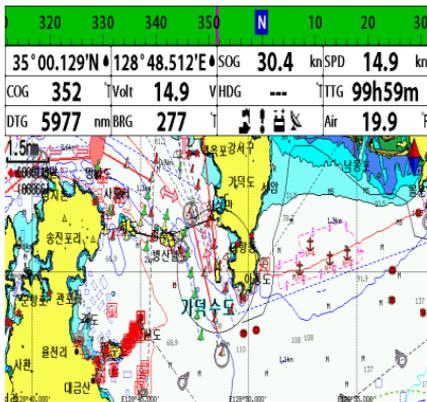


2-8 Multi window displays

The Chart plotter can display up to four windows at the same time.



Adding a window

- 1 Press **PAGE** and select **Add** icon.
- 2 Select an icon you want to add.
- 3 Repeat above steps if necessary.

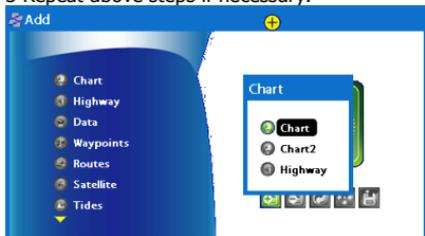

Changing window size

- 1 Press **PAGE** and select **Split** icon on bottom.
- 2 Press **▲** or **▼** to change the height of the windows if there is only two windows. If the unit is displaying more than three windows, press **▲**, **▼**, **◀** or **▶** to change the height of the windows.

Deleting a window


- 1 Press and hold **PAGE** to select a window you want to delete.
- 2 Press **PAGE** and select **Remove** icon to remove.

Replacing two windows on the display

- 1 Press and hold **PAGE** to active desired window you want to replace.
- 2 Press **PAGE**, select **Replace** icon.
- 3 Select icon you want to display then press **↓**.


The active window

To distinguish an active window among windows, an orange border indicates the active window. To change the active window to the next window, press and hold **PAGE**.

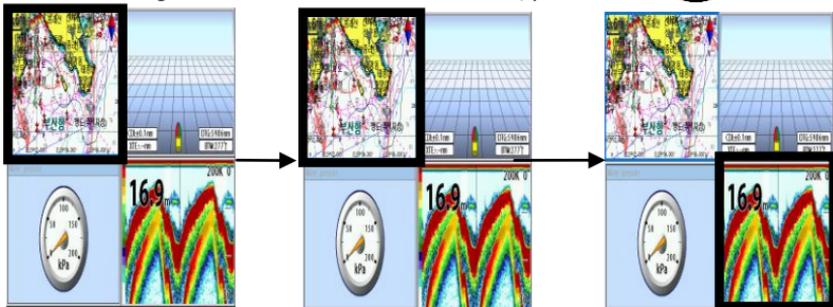

Favorite displays

The most commonly used windows are called favorite displays and up to six favorite windows can be saved. Also each favorite display can have data bar and compass.

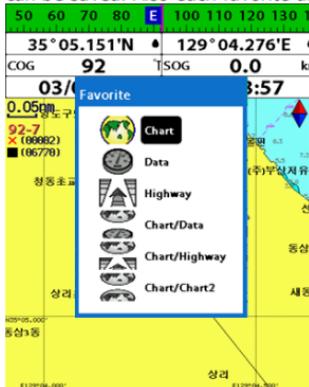

Displaying a favorite display

- 1 Press **PAGE** twice.
- 2 when above window pops up select a desire display you want.

Adding a favorite display

- 1 Organize a window as you want.
- 2 Press **PAGE** to show the main window.
- 3 Select **Save** icon at the bottom
- 4 Select an icon where you want to add your favorite display. If you add the new favorite display on existing favorite display new display will overwrite the old display.

2-9 Man overboard (MOB)

During navigation, the “MOB” feature provides a one-touch method of storing a location, such as point where a crew member fell overboard. In this mode, the chart plotter places a MOB point on the chart page and all the navigation data shown is related to navigating back to this point, allowing you to retrace your path to the MOB point efficiently.



This might result in a sudden and dangerous turn.



Tip: Even though navigation to MOB waypoint is canceled, the MOB waypoint is not be removed from the waypoint list. To delete the MOB waypoint, you need to delete it manually. MOB is saved in Waypoint window of Main screen. Please refer p39 for how to delete.



MOB will not work if the unit does not have a GPS fix.


- 1 When you press **MOB**, a MOB waypoint is created.
- 2 When **MOB** is pushed not in the **Chart** window, the screen automatically is changed to **Chart** window and MOB waypoint is at the center of the chart.
- 3 If autopilot is connected, the unit sets the MOB waypoint to be the destination and start to navigate.

3 General Operation

3-1 Manual / Auto Power on and off

Manual power on

Press **[D]** and hold until the display shows the start up page. When the Warning screen appears, press **[D]** to accept.

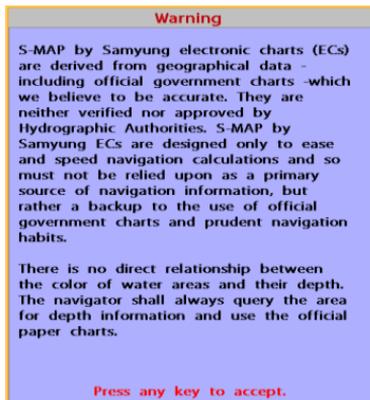

Manual power off

Press and hold **[D]** for 5 seconds. A counter timer appears on the screen, if you release the button before the countdown timer reaches zero, the chart plotter will remain On.

Auto power

If the unit is wired for auto then:

- The unit turns on automatically when you turn on the boat's ignition.
- You can not turn off the unit if the ignition is turned on.
- If Auto power off is set, the unit turns off automatically when you turn off the boat's ignition.
- If Auto power off is set, the unit will not be turned off even though the boat's ignition is turned off. To turn off, you need to turn off the unit manually.

3-2 Brightness, night mode and Background

You can change the screen setting for the display. To change settings, shortly press **[D]**.



Brightness

To change the brightness, select **Brightness**, and press **[Left]** to dim or **[Right]** to brighten.
Press **[ESC]** to return to the previous screen.

Night mode

The chart plotter has preprogrammed settings allowing you to customize the look of the **Chart** window. The default is daytime view. Select **Night mood** depending on what mode the display is in at the time of selection.

To change mode:

- 1 Highlight **Night mode**.
- 2 Press **[Right]** or **[Left]**.


Tip: The screen will be difficult to read if the chart plotter is in **night mood** when the sun is too bright

Background

You can Change the background color if necessary. This selection is a personal preference. Select the option that gives you the clearest viewing in your weather conditions and viewing angle.

3-3 The page window

Press **PAGE** to show the page window and select a function icon you want to display.

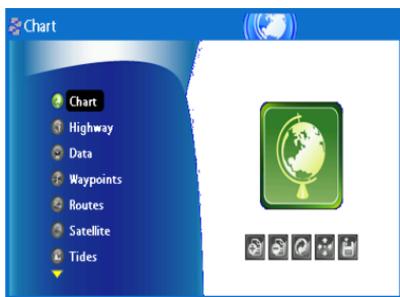


NF700 (N700 has no sonar function.)

Note


- 1 Some function icons require optional units and connected sensors.
- 2 If you press **PAGE** one more time in the main window, favorite window is displayed.



Chart



Sonar



Highway



Data



Waypoints

이름	좌표	고도	비고	비고
WPT0001	128°23.5197E	11.1	11.1	11.1
WPT0002	34°39.4896N	19.4	19.4	19.4
WPT0003	128°44.5905E	42.6	42.6	42.6
WPT0004	34°52.2576N	19.4	19.4	19.4
WPT0005	128°42.6695E	15.5	15.5	15.5
WPT0006	34°46.4676N	1.5	1.5	1.5
WPT0007	128°39.4376E	18.2	18.2	18.2
WPT0008	34°32.5876N	2.4	2.4	2.4
WPT0009	128°32.5197E	18.2	18.2	18.2
WPT0010	34°39.2676N	1.8	1.8	1.8
WPT0011	128°22.5876E	21.5	21.5	21.5
WPT0012	34°43.8876N	2.8	2.8	2.8
WPT0013	128°38.3795E	35.5	35.5	35.5
WPT0014	34°43.8876N	8.5	8.5	8.5
WPT0015	128°18.3876E	285.7	285.7	285.7
WPT0016	34°46.8876N	12.4	12.4	12.4
WPT0017	128°18.4376E	295.5	295.5	295.5




Routes


이름	좌표	고도	비고	비고
ROUTE01	WPT0001	WPT0011	2	3
ROUTE02	WPT0001	WPT0011	3	3
ROUTE03	WPT0002	WPT0008	3	3
ROUTE04	WPT0004	WPT0010	5	5
ROUTE05	WPT0002	WPT0009	6	6
ROUTE06	WPT0010	WPT0017	2	2



Satellites



Tides



AIS

이름	좌표	고도	비고	비고
4409	44.0	1	333333333	
9294	9.2	22	333333333	
1.83	1.83	1	444444444	PLA15M0-A
1.49	2.4	2	444444444	444444444
1.84	8.4	25	222222222	PLA15M0-B
2.18	15.4	18	333333333	PLA15M0-C
2.65	17.8	16	333333333	333333333
2.89	9.4	23	333333333	333333333
3.25	18.4	12	777777777	



DSC

Distress	Call	Priority	
Date	Latitude	MOE	
Time	Longitude	NAME	
18/01/2009	34°43.5176N	128°11.1111E	
12:47	128°24.8876E		



Navtex

Time	MSGID	Priority
18:51 24/Jan/09	0163	STORM
13:82 24/Jan/09	AC35	STORM
18:39 24/Jan/09	0813	STORM

ISSUED ON SATURDAY 24 JANUARY 2009
 READING: METEO FORECAST TO 12 HOURS
 OFFSHORE FROM 1700 UTC TO 0500 UTC
 NUMBER REFERRED TO: KELLEY RLL
 12 HOURS FORECAST
 SHOWERS WINDS, STRONGEST IN MORNING



Engine Faults

Engine	Part	Over Temperature
Port	Over Temperature	
Port	Low Fuel Pressure	
Port	Charge Indicator	
Port	InPort/In Indicator	
Starboard	Low oil pressure	
Starboard	Low Fuel Pressure	

3-4 Chart


The **Chart** window mainly shows all relevant navigation data available on your preloaded maps, including buoys, lights, cables, depth soundings, marinas, and tide station in an overhead view.

3-4-1 Chart window

To go to the **Chart** window:

- Press **PAGE** and select **Chart** icon by pressing **←**.

A typical Chart window shows:

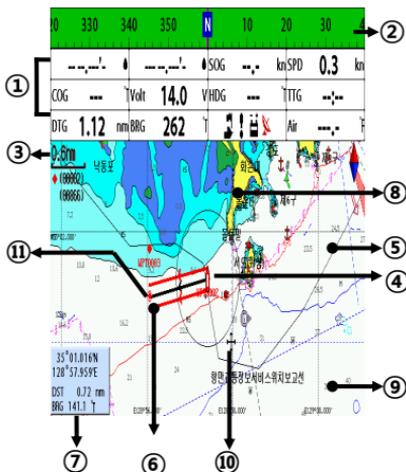

- ① Data bar. To turn the data off or on or to change what data is displayed
- ② Compass
- ③ Chart scale
- ④ Boat position
- ⑤ Boat track
- ⑥ Boat course and CDI lines
- ⑦ Distance and bearing of cursor from boat
- ⑧ Land
- ⑨ Sea
- ⑩ The cursor
- ⑪ A typical waypoint

The built-in world chart does not show enough detail for navigation. When you use the Chart Plotter to navigate, always use a chart card which covers the region.(NAVIONICS)

3-4-2 Latitude and longitude

Latitude and longitude coordinates define a position on earth and can be displayed in data bar.

In the data bar, own ship position is shown as below:

- 47° 43.000' N or S Latitude
- 003° 21.656' E or W Longitude

47° 43.000'N	●	003° 21.656'W	●
--------------	---	---------------	---

However, if you move the cursor, then the latitude and longitude in the data bar is the cursor's position as below.

- + 47° 43.325 N or S Latitude
- + 003° 29.607 E or W Longitude

47° 43.325'N	+	003° 20.607'W	+
--------------	---	---------------	---

Info

Latitude: Angular distance North or South of the equator measured by lines encircling the earth parallel to the equator in degrees from 0° to 90°.

Longitude: angular distance North or South of the equator measured by lines encircling the earth parallel to the equator in degrees from 0° to 90°.




When reading the boat position, make sure the position is not the cursor position.

3-4-3 Chart scale

The chart scale change by pressing **+** to show more detail information of chart and by **-** to show wider view of the chart.

When you press **+** or **-**, the scale of chart is display in the chart on top left corner.



3-4-4 Finding a chart symbol

This function is only available when NAVIONICS SD card is inserted and NAVIONICS is selected.

To find a port by name

- 1 Press **MENU**.
- 2 Select **Find** then **Port by name**.
- 3 Press **▲** or **▼** to select a letter then press **▶** for next letter.
- 4 Once you enter the name of port, press **↓**.
- 5 After searching process, select a nearest port in the list then the cursor will place on the port you selected on the chart window.
- 6 Repeat 2-3 steps of D section to display the information.

To find port & service

- 1 Press **MENU**.
- 2 Select **Find** then **Port & service**.
- 3 Select a service you want to find.
- 4 After searching process, select a nearest service area in the list then the cursor will place on the service area you selected on the chart window.



S-MAP does not support this function.
(See 2-4 for chart selection)




3-4-5 S-Map search

This function is available when NAVIONICS SD card is inserted and NAVIONICS is selected.

To find port & service

- 1 Press **MENU**.
- 2 Select **Find** then **Port**.
- 3 Press **▲** or **▼** to select a port then **↓**.
- 4 After searching process, select a nearest port in the list then the cursor will place on the port you selected on the chart window.



3-4-6 Chart symbols and information



This function is only available when NAVIONICS SD card is inserted and NAVIONICS is selected.

Using NAVIONICS card allows you to show different kind of symbols and their information on chart plotter display. On some objects such as a port, you can see a picture of landscape layout.


To display information

- 1 Move cursor on an icon to display its name.
- 2 Press **MENU** and select **Chart info**.
- 3 Move cursor key to highlight an item and press **↓**.
- 4 Information related to the item appears at the bottom window.

[Chart info]

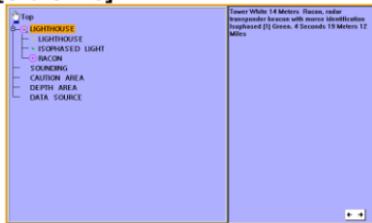

[Chart symbol Data Box]

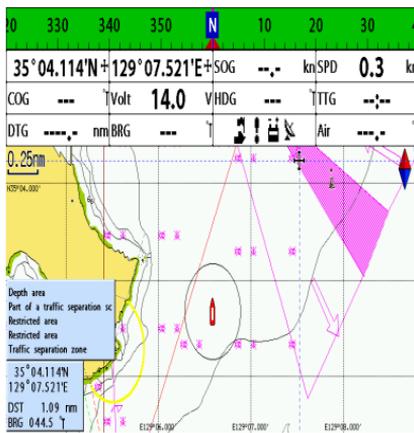

3-4-7 Introduction to navigating

Use the navigation chart to plan your course, view map information, and as a navigational aid. This unit has two ways of navigating, going straight to a waypoint or following a route (a group of waypoints).

3-4-8 Going to a waypoint or to a point on the chart

A waypoint is a particular location on a voyage whether it is a starting, intermediate or destination point. A waypoint is the simplest piece of information your equipment requires to get you to a destination. In the shortest distance possible. This unit can save up to 10,000 waypoints.

Goto Cursor Option


- 1 Press **PAGE** and select the **Chart** window.
- 2 Move the cursor to the destination point.
- 3 Press **MENU** and select **Goto cursor** to start navigating.

Goto WPT Option

- 1 Press **PAGE** and select the **Chart** window
- 2 Move the cursor to place cursor on a waypoint.
- 3 Press **MENU** and select **Goto WPT** to start navigating.

Find Option

- 1 Press **PAGE** and select the **Chart** icon.
- 2 In the **Chart** window, press **MENU** and select **Find** then **Waypoints**.
- 3 select a waypoint to start navigation.



Cancelling navigating

- 1 Press **PAGE** and select the **Chart** icon.
- 2 Press **MENU** and select **Cancel Goto**.

3-4-9 Following a route

Often a trip from one place to another involves several course changes, requiring a series of route points (waypoints) which you navigate to, one after another. The sequence of waypoints leading to the ultimate destination is called a route. You can save up to 100 routes and a route may consist of 100 waypoints.

Start Route Option

- 1 Press **PAGE** and select the chart window.
- 2 Press **MENU** and select **Start Route**.
- 3 Move cursor keys to select a route to start navigating.
- 4 Select **Forward** or **Reverse** to decide which direction you want to navigate.

Route Window Option

- 1 Press **PAGE** and select the routes window
- 2 In the route window, mover the cursor to highlight a route you want to start navigating to.
- 3 Press **MENU** and select **start**
- 4 Select **Forward** or **Reverse** to decide which direction you want to navigate.

Create Route Option

- 1 Press **PAGE** and select the chart window.
- 2 Select **New route**.
- 3 Name a route name.
- 4 Move cursor keys to select a waypoint.
(Repeat this step as much as you need)
- 5 Press **MENU** and select **Add**.
- 6 Press **ESC**.
- 7 Repeat 2-4 steps of Route window option.

Skipping a waypoint

- 1 Press **PAGE** and select the chart window.
- 2 Press **MENU** and select **Skip**.
- 3 Repeat above step if necessary.

Cancelling a route

- 1 Press **PAGE** and select the chart window.
- 2 Press **MENU** and select **Cancel route**.

3-4-10 Goto Key

This key is very useful when you desire to start navigating to a destination point. When the key is pressed, it starts navigating to the point of the cursor or Route.

Going to a point

- 1 Move the cursor to an open position.
- 2 Press **GOTO**.

3-4-11 Distance and bearing calculator

The unit can show the bearing and the length of leg and the total distance of legs.

Setting Legs

- 1 In the chart window, press **MENU** and select **Distance**. Information is displayed on window showing bearing/leg distance/total distance at bottom pop up at the bottom left side
- 2 Move the cursor to the start point which is start point of first leg and press **↓**.
- 3 Move the cursor to a point which is the end of first leg.
- 4 Repeat 2-3 steps for more legs.
- 5 Press **ESC** to exit.


Deleting the last leg

- 1 Press **MENU** and select **Remove**.
- 2 Repeat above step if you want to remove more legs.

Saving as a route


- 1 Once you set all the legs, press **MENU** and select **Save**.
- 2 Enter a route name by pressing **▲** or **▼** to select a letter then press **▶** for next letter.
- 3 Press **⏎** to save the new route.

Tip: Bearing and distance

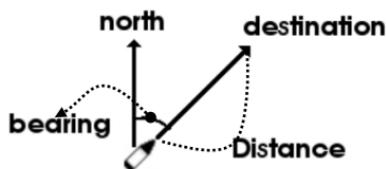


3-4-12 Projected course

The projected course shows you how far it can go at give time and speed. This function is very useful to avoid collusion with other vessels.

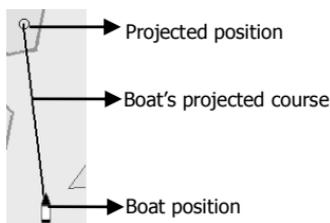


3-4-13 Finding a chart symbol

In the chart window, press and hold **↓** Or **MARK** then select destination chart symbol.

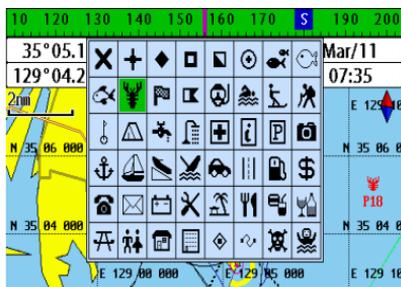

3-4-14 Finding a chart symbol

For tracks setting in the chart window, press and hold **ESC**. (See 4-5 Track Setting)

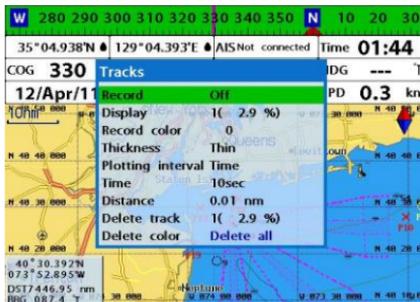


3-5 Sonar

The NF700 proposes a sonar function when the unit is connected to an optional depth transducer.

To activate sonar function;

- 1 Press and hold **MENU** and select **System Configuration** icon
- 2 Select **Features** then **Sonar**.

3-5-1 Interpreting the display

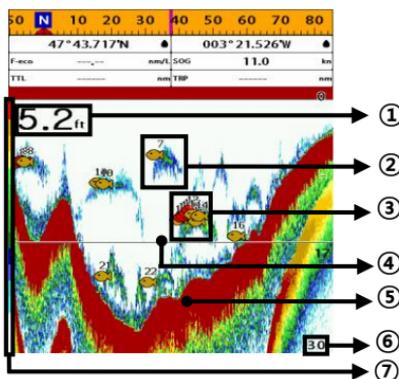

- ① Depth.
- ② Single fish : Fish symbols with depth.
- ③ School of fish.
- ④ Depth line.
- ⑤ Bottom : Hard bottoms such as rock and coral shown as wide bands.
Soft bottoms such as mud, weed and sand show as narrow bands.
- ⑥ Range of display.
- ⑦ Color bar.

The window scrolls from right (recent sonar record) to left (old sonar record).


3-5-2 Mode

The unit operates in two different modes. You can choose a mode depending on the condition.

- **Auto mode:** This is the most commonly used option. In this mode, settings are automatically adjusted for the best display of fish and bottom according to environment.
- **Manual mode:** Use this option for manual setting. The option might bring you best result for your purpose.

To change a mode;

- 1 Press **MENU** then select **Gain**.
- 2 Select **Mode** then **Manual** or **Auto** and press **↓**.
- 3 Press **ESC** to exit until returning to the **Chart** window.

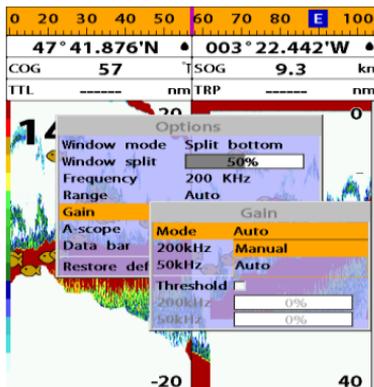

3-5-3 Single and Dual frequency fish finding

Sonar frequencies

The unit has dual frequency, 200kHz and 50kHz to detect various bottom conditions.

To select the sonar frequency in sonar window:

- 1 Press **MENU**, select **Frequency**.
- 2 Select **frequency** and press **↓**.
- 3 Press **ESC** to exit.

High frequency (200kHz)

The higher ultrasonic signal, the better is the resolution. For this reason the 200 kHz frequency is ideal for detailed observation of fish schools.


Low frequency (50kHz)

The lower frequency signal is, the wider is the detection area. Therefore, the 50kHz frequency is useful for general detection and judging bottom condition.

Mixed frequencies (200kHz / 50kHz)

The Mixed frequency combines the 200 kHz and the 50 kHz in the Sonar window. The 50kHz picture appears on the left and the 200kHz picture on the right.

The display is useful for comparing the same picture with two different frequencies.

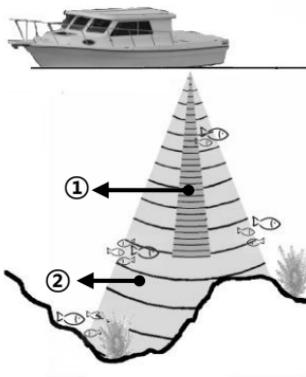

- ① High Frequency (200 kHz)
- ② Low Frequency (50 kHz)

3-5-4 Range

Range is the depth of water displayed on the sonar window. The basic range may be chosen in Auto or manual mode.


Auto: When the mode is set to **Auto**, the unit adjusts the depth automatically for the best performance. This option is recommended for normal operation.

Manual: When the mode is set to **Manual**, the unit only displays the depth of water at a given range. That means the sea bottom might not be displayed in the sonar window or it might display half of display in white because range is more important than sea bottom depth. As shown in below images.


To set the manual mode in the sonar window:

- 1 Press **MENU**, select **Range**.
- 2 Select a mode you want and press **↓**.
- 3 If you select the manual mode, press **+** or **-** to change value of max displayed depth.

[When the set depth is too low]

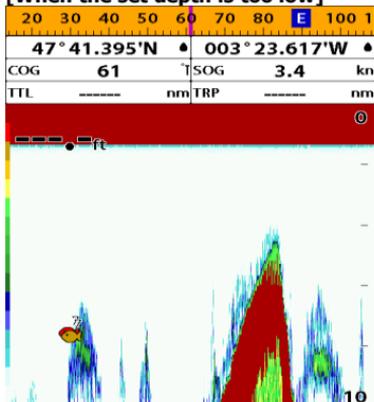

[When the set depth is too high]

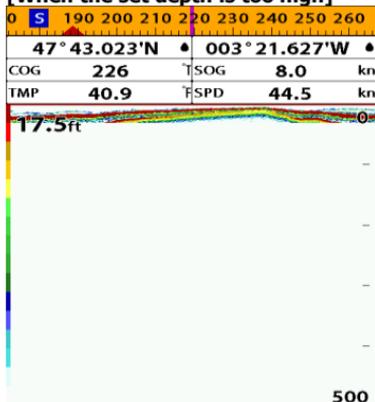

3-5-5 Gain

The gain menu

The gain is a signal strength received from the transducer and the threshold is the level of ultrasonic that is ignored by a set value. When you use the manual mode and threshold, the values of gain and threshold need to be set very carefully.

In the **Gain** window, you can set for a gain mode and threshold.

Gain	
Mode	Manual
200kHz	10
50kHz	10
Threshold	<input type="checkbox"/>
200kHz	0%
50kHz	0%

To change a mode,

- 1 Press **MENU**, select **Gain**.
- 2 Select a mode.
- 3 If you select a **Manual** mode, adjust each frequency gain value by pressing **←** or **→**. Even though you select the **Auto** mode, it will be changed to manual mode if you change the values of frequency.

3-5-6 Sonar window display

Five sonar display windows are available and each display window has unique characteristics. Select a display window depending on your needs. The default display is No split.

To change a Sonar display window in the sonar window:

- 1 Press **MENU**, select Window mode.
- 2 Select the sonar display you want.

No split: Display Sonar history at a given frequency (50 or 200 kHz) (see section 3-5-7)

Split zoom: This mode expands chosen area of the normal picture in full vertical size on the left-half part of the window.

Full screen zoom: Display a zoomed section on full screen (see section 3-5-8)

Split bottom: Display Sonar history and a bottom trace focus in a zoomed section (see section 3-5-9)

Split 50/200: Display the 50 kHz sonar history on the left and the 200 kHz sonar history on the right. This display is useful for comparing the same history with two different frequencies. (see section 3-5-10)

Split A-Scope: Display Sonar history and echo strength (see section 3-5-11)
You can change the split ratio if the window is split.

- 1 Press **MENU** and select **Window split**.
- 2 Press **←** or **→** to adjust the ratio.
- 3 Press **↓**.

Options	
Window mode	Split A-scope
Window split	No split
Frequency	Split zoom
Range	Full screen zoom
Gain	Split bottom
Data bar	Split 50/200
Restore default	Split A-scope

3-5-7 No split

No split window displays a sonar history at a given frequency (50 or 200 kHz)

Low Frequency (50 kHz)


The 50 kHz frequency is ideal for detecting the wider area which means low frequency is useful for general detection and judging bottom condition.

High Frequency (200 kHz)

The 200 kHz frequency is ideal provide a better resolution which means it is ideal for the observation of fish or fish schools.

To set a frequency for this display:

- 1 Once you select **No split** window, Press **MENU**.
- 2 Select the sonar icon then **Frequency**
- 3 Select a desired frequency

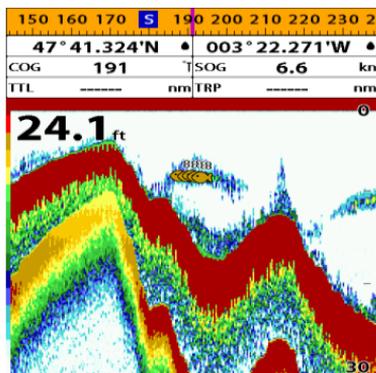

You can also review old sonar records, press **←** and **→** to review the history. To return to current scanning, press **ESC**.

3-5-8 Split zoom and Full Screen zoom

Split zoom

Split zoom mode expands selected area of the single frequency by VRM(Variable Range Mark). The left side displays zoomed section of current sonar record. The VRM of right side indicates the zoom section area.

- Press **▲** or **▼** to change the zoom range.
- Press **+** or **-** to change the depth range.

Bottom lock


If **Bottom lock** is on, the zoom depth (the depth of the zoom section) is adjusted automatically so that the bottom is always displayed in the zoom section.

- To turn Bottom lock on or off press **MENU**


Full Screen zoom

Full screen zoom displays only the zoom section of split zoom.


[Split zoom]

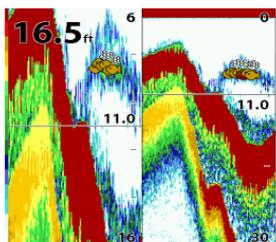

[Bottom Lock]

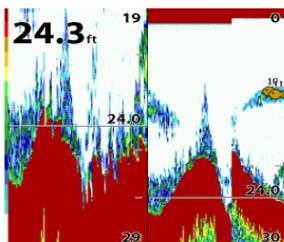


[Full screen zoom]

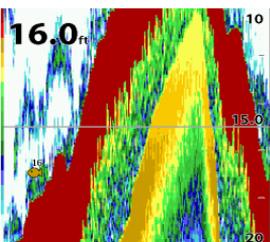

3-5-9 Split bottom


Split bottom display provides a normal picture on the right half and a selectable range over and below the bottom line is expanded onto the left half of the screen. This mode is useful for detecting bottom fishes.

- Use the **◀** or **▶** keys to adjust the zoom range.
- Press **+** or **-** to change the range
- The VRM moves up and down to calculate the bottom depth automatically.

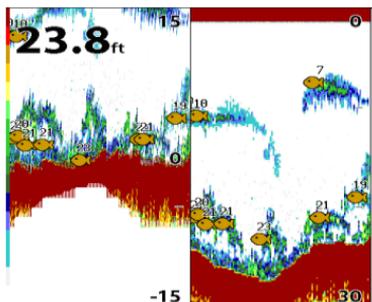

3-5-10 Split 50/200

The 50 kHz display appears on the left and the 200 kHz appears on the right. This dual frequency display is very useful for comparing the same scanning with two different frequencies.

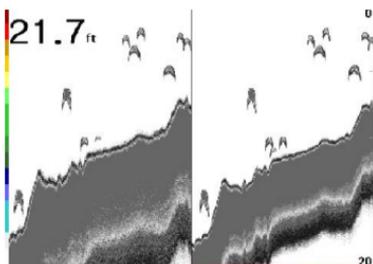


3-5-11 Split A-Scope


This display shows echoes at each transmission with amplitudes and colors proportional to their intensities; on the right of the screen it is useful for estimating the kind of fish schools and bottom nature.

Echo strength color code varies from weakest (blue) to strongest (red).

- ① Echoes from fish and the bottom
- ② Unwanted noise echoes.
- ③ The strongest echo, usually from the bottom.

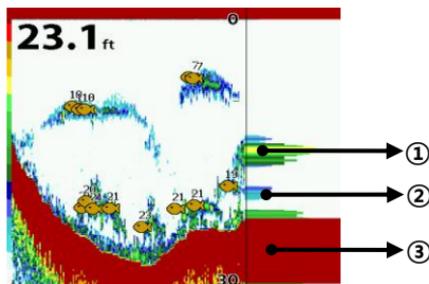

3-6 Highway

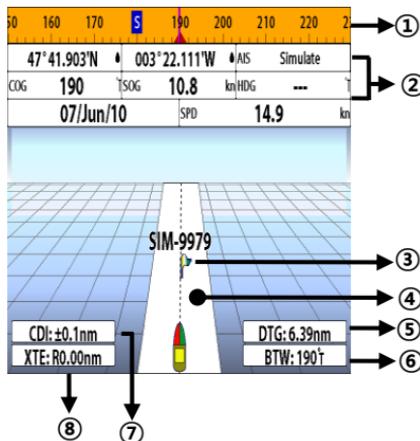

The **Highway** window shows a 3D view of the vessel traveling through the water when navigating to a destination point.

To go to the **Highway** window, press **PAGE** and select **Highway** icon.


The **Highway** window shows:

- ① Compass.
- ② Data bar.
- ③ Destination waypoint.
- ④ Boat's plotted course to destination.
- ⑤ DTG scale (Distance To Go).
- ⑥ BTW scale (Bearing to waypoint).
- ⑦ CDI (Course Deviation Indicator).
- ⑧ XTE scale (Cross Track Error).

3-7 Gauges

The **Gauges** window displays all the information you need during navigation such as water, engine, fuel related information, etc.

To select the **Gauges** window, press **PAGE** and select **Data** icon.

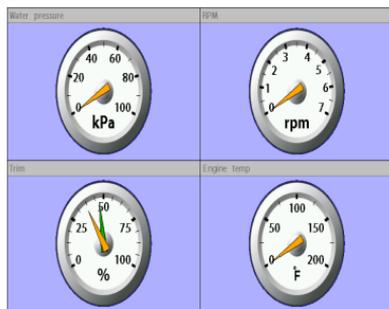

Selecting a Gauges layout

The **Gauges** window can show one of seven gauge layouts.

- To select a layout from the **Gauges** window:
- 1 Press **MENU** and select **Gauge Layout**.
 - 2 Select one layout.

Changing a gauge in one selected

To change a gauge displayed in a layout in Data display.

- 1 Press **MENU** and select **Gauge Setup** then the upper left side gauge will be highlighted.
- 2 Select a gauge you want to change and select Gauge type.
- 3 Select a data type you want to display.



3-8 Waypoints

A waypoint is a particular location on a voyage whether it is a starting, intermediate or destination point. A waypoint is the simplest piece of information the unit requires to get you to a destination in the shortest distance possible. This unit can save up to 10,000 waypoints.

To display waypoint list, press **PAGE** and select **Waypoint** icon.

Waypoints					
Name	Latitude Longitude	DIST IBC	rm Y	Drp Disp	
MCB0002	47°43.000N 003°22.000W	1.7	No		
MCB0003	47°43.000N 003°22.000W	1.7	No		
MCB0004	47°43.000N 003°22.000W	1.7	No		
MCB0005	47°43.000N 003°22.000W	1.7	No		
MCB0006	47°43.000N 003°22.000W	1.7	No		
MCB0007	47°43.000N 003°22.000W	1.7	No		

To select To Page Up/Down

3-8-1 Creating a new waypoint

To create a waypoint from the chart window

There are two ways to create a new waypoint from the chart window as described below:

- 1 Press **WPT** on at the current boat position.
- 2 Move the cursor to a point where you want to create a waypoint and press **WPT**.

To create a waypoint from the waypoints window

- 1 Press **MENU** and select **Create**.
- 2 Enter waypoint data, change alphanumerical name, choose between 48 icons, 16 colors and display option.
- 3 Select **Save**.

3-8-2 Moving a waypoint

To move a waypoint from the chart window

- 1 Move the cursor to place it on the waypoint you want to move. (If you move the cursor on the waypoint correctly, waypoint information will be displayed at the bottom left).
- 2 Press **MENU** and select **Move**.
- 3 Move the cursor to a point where you want to move and press .

To Move a waypoint from the waypoints window

- 1 Highlight a waypoint you want to move.
- 2 Press **MENU** and select **Edit**.
- 3 change the existing latitude and longitude to new position.
- 4 Select **Save**.

3-8-3 Editing an existing waypoint

To Edit a waypoint from the chart window

- 1 Move the cursor to the waypoint you want to edit. (If you move the cursor on the waypoint correctly, waypoint information will be displayed at the bottom left)
- 2 Press **MENU** and select **Edit**.
- 3 Edit waypoint data as you need and press .

To Edit a waypoint from the waypoints window

- 1 Move cursor key to highlight a waypoint you want to edit.
- 2 Press **MENU** and select **Edit**.
- 3 Edit waypoint data as you need and press .


3-8-4 Deleting a waypoint

To delete a waypoint from the chart window

- 1 Move the cursor to the waypoint you want to delete. (If you move the cursor on the waypoint correctly, waypoint information will be displayed at the bottom left)
- 2 Press **MENU** and select **Delete**.
- 3 Select **Yes**.

Deleting a waypoint from the waypoints window

- 1 Move cursor key to highlight a waypoint you want to delete.
- 2 Press **MENU** and select **Delete**.
- 3 Select **Yes**.

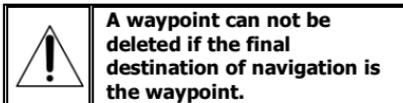


3-8-5 Find a waypoint

To find a waypoint from the chart window

Finding waypoints from the chart window is a simplified function.


- 1 Press **MENU** and select **Find**.
- 2 Select **Waypoints**.
- 3 Move cursor key to highlight a waypoint you want to find and press **↓**.

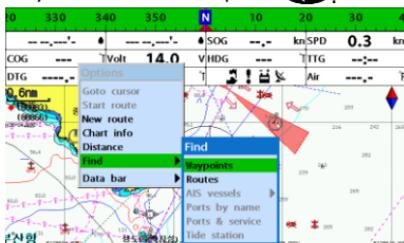

To find a waypoint from the waypoints window

Finding waypoints from the waypoints window is provided by a full function.

- 1 Press **MENU** and select **Find**.
- 2 Press **▲**, **▼**, **◀** or **▶** to find a waypoint name.
- 3 Select **↓**.

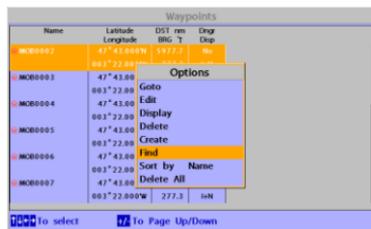

3-8-6 Sort Waypoints

To change the order of displayed waypoint list:

- 1 Press **MENU** and select **Sort by**.
- 2 Select a sort type.

3-8-7 Deleting all waypoints

- 1 In the waypoints window, press **MENU** and select **Delete all**.
- 2 Select **Yes**.



3-9 Routes

A trip from one place to another often involves several course changes, requiring a series of waypoints which you navigate to, one after another. The sequence of waypoints leading to the final destination is called a route. The unit can automatically advance to the next waypoint on a route. So you do not have to change the destination waypoint repeatedly.

The unit has the capability to store 100 routes with maximum of 100 waypoints each.

To display the **Routes** window, press **(PAGE)** and select the **Routes** window.

Routes					
Name	Start	End	Legs	DSTime	
MCROUTE	SM-9279	SM-9399	11	01	
ROUTE01	WPT0011	WPT012	2	01	
ROUTE02	WPT011	WPT013	2	41	
ROUTE03	WPT011	WPT016	6	201	

3-9-1 Managing a route from the chart window

Creating a new route window

- 1 Press **(MENU)** and select **New route**.
- 2 Enter the new route name using cursor key and press **(↓)**.
- 3 On the **Chart** window, move the cursor to the position of the starting waypoint in the Route and press **(←)**.
- 4 Move the cursor keys to the position of next waypoint and press **(↓)**.
- 5 Repeat step 4 to enter more waypoints.
- 6 Once you entered the last waypoint in the route, press **(MENU)** and select **End**.

Editing a waypoint in route while creating a route

- 1 Move the cursor to the waypoint you want to move.
- 2 Press **(MENU)** and select **Move**.
- 3 Move cursor to a position where you want to move the waypoint and press **(↓)**.

Deleting a last waypoint from the route while creating a route

- 1 Press **(MENU)** and select **Delete**.

Deleting a waypoint from the route while creating a route

- 1 Move the cursor to the waypoint you want to remove.
- 2 Press **(MENU)** and **Remove**.


Tip: Even though you deleted a waypoint in the route, the waypoint still remains in the waypoint list.

Inserting a waypoint while creating a route

- 1 If you want to insert a waypoint between waypoints which will be just after the one you want to insert.
- 2 Press **(MENU)** and select **Insert**.
- 3 Move the cursor to the new inserted waypoint and press **(↓)**.

Inserting a waypoint in front of starting waypoint while creating a route

- 1 Move the cursor to the starting waypoint
- 2 Press **(MENU)** and select **Insert**.
- 3 Move the cursor to the new start location and press **(←)**.

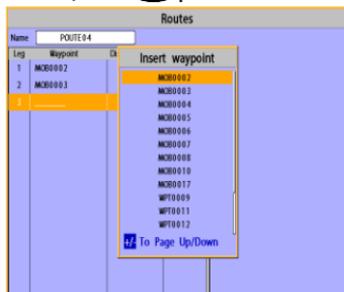

3-9-2 Managing a route from the route window

Creating a route from the route window

- 1 To go to the **Route** window, press **PAGE** and select the **Route** icon
- 2 Press **MENU** select **Create**
- 3 If you want to enter a route name, highlight name and press **↓**.
- 4 Press **✓** and press **↓**.
- 5 Press **↑** or **✓** to highlight a waypoint
- 6 Press **↓** to insert a waypoint
- 7 Repeat step 5 and 6 until you create a route
- 8 Press **ESC** to exit

Inserting a waypoint between two waypoints

- 1 In the **Route** window, select a route you want to insert in the route list and press **↓** or press **PAGE** and select **Edit**.
- 2 Highlight a leg where you want to insert a waypoint
- 3 Press **MENU** and select insert
- 4 Highlight a waypoint and press **↓**.
- 5 Press **ESC** to exit

Editing a route in the chart window

- 1 In the route list, press **MENU** and select **Edit** on chart.
- 2 Follow the procedure of "Editing a waypoint in route while creating a route"

Deleting a waypoint in the waypoint list

- 1 Highlight a waypoint you want to delete in the waypoint list.
- 2 Press **MENU** and select **Remove**.

Deleting a route in the route window

- 1 Highlight a route you want to delete.
- 2 Press **MENU** and select **Delete**.

Deleting all route in the route window

- 1 Press **MENU** and select **Delete All**.

Displaying a route in the **Chart** window from the route list:

- 1 Highlight a route you want to display in the **Chart** window.
- 2 Press **MENU** and select **Display**.

Routes					
Name	Start	End	Legs	DSTime	
ROUTE-01	WPT0011	WPT0012	2	0-	01
ROUTE-02	WPT0011	WPT0013	2	61	
ROUTE-03	WPT0011	WPT0016	6	201	



3-10 Satellites

3-10-1 Satellite information

Acquiring GPS signals


When the unit is first turned on it will take some time for the GPS signal acquiring. After signals are received, the unit will automatically find a position of boat in the chart window.

Satellite information window

The satellite window displays different information about the GPS satellites and GPS position as below.

To go to the satellite window, press **PAGE** and select **Satellite** icon.


The satellite window shows:

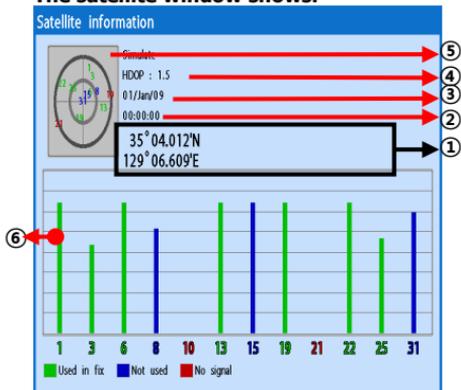

- ① Ship's Coordinates.
- ② Time received GPS satellites.
- ③ Date received GPS satellites.
- ④ HDOP: Horizontal Dilution of Precision. It is a parameter indicating the accuracy of the GPS.
- ⑤ Location of GPS Satellites.
- ⑥ GPS signal strengths status in graph.

Press to display GPS signal information from GPS satellite in NMEA0183 data format at the GPS signal strengths status display.

To return to GPS signal strengths status display, press again.

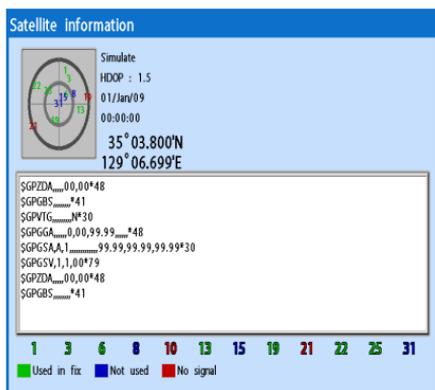

3-11 Tides

The **Tides** window is useful for boaters that are concerned about the height of the water or by fisherman that wish to know the tide and moon phase of a specific date.

Displaying a tide information from the chart window

- 1 In the **Chart** window, press **MENU**.
- 2 Select **Find and Tide station**.
- 3 Press **▲** or **▼** to move cursor and select a tide station
- 4 Press **▲**, **▼**, **◀** or **▶** to the position of selected tide station and press **↓**.
- 5 Select **Tide height station** to display the information
- 6 Press **ESC** to exit.

Displaying tide station information in the tides window


- 1 Press **PAGE** and select **Tides** window.
- 2 Select **Tide height station** to display the information.
- 3 Press **ESC** to exit.

Tip: The unit only displays the tide information nearest your boat in the tides windows.

Choosing the date of the tide information.

- 1 In the Tides window, Press **MENU** and select one of the following options.
 - **Set date:** manually set a date.
 - **Today:** automatically set the date of today.
 - **Next day:** automatically set the date of today.
 - **Prev day:** automatically set the date of yesterday
- 2 Press **ESC** to return to the window.

The tides window shows data for the chosen date

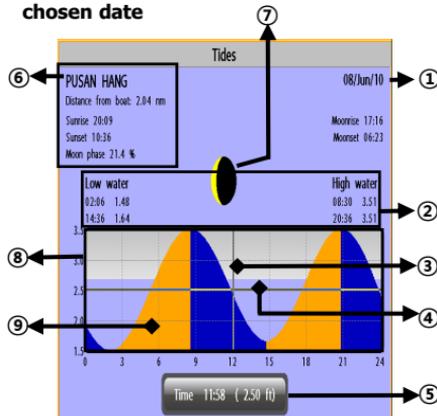

- ① chosen date for display.
- ② Data for the chosen date.
- ③ Time cursor, a vertical dotted line. Press **◀** or **▶** to move cursor sideways.
- ④ Tide height cursor, a horizontal dotted line. Press **▲** or **▼** to move cursor up and down.
- ⑤ Time of cursor and tide height at that time.
- ⑥ Tide station name and distance from boat.
- ⑦ Moon phase for moon at the current time on the chosen date.
- ⑧ Tide chart.
- ⑨ Tide height.



3-12 AIS

AIS is an Automatic Identification System for identification and localization of boat. AIS provide a means for boats to exchange and share boat data including identification, position, course, etc. This information can be displayed on the screen of you unit. AIS is intended to assist you to monitor other boats movements to improve safety and prevent collision.

AIS functions require an optional AIS unit to be installed. Contact your nearest Samyung ENC dealer for more details or visit at www.samyungenc.com.


To activate AIS function:

- 1 Press and hold **MENU** and select **System Configuration** icon.
- 2 Select **Features** then **AIS**.

3-12-1 Viewing AIS Vessels

When the unit is connected to AIS unit which support NMEA0183 or NMEA2000, you can check other vessel that are equipped with AIS unit on the screen. To check AIS information place the cursor on the AIS object then AIS information displays at the bottom of window.

- ① AIS equipped vessel
- ② Dangerous Vessel
- ③ Projected Course
- ④ AIS equipped vessel Data Box
- ⑤ Range Rings

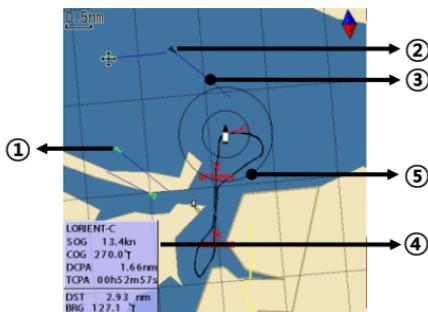

3-12-2 AIS Windows

To display the AIS windows:

- 1 Press **PAGE**, and select **AIS** icon.
- 2 Press and hold **PAGE** to select one of the two tabs: **Vessels** or **Messages** tab.
 - **Vessel:** show you all the AIS equipped vessel around you. (up to 200 vessels)
 - **Message:** show you all the messages related to safety from other AIS equipped vessels.

Sorting Vessels

- 1 Press **MENU**, select **Sort by**.
- 2 Select one of the options.

Displaying an AIS vessel on the chart

To overlay AIS equipped vessel on the chart window:

- 1 Press **▲** or **▼** to select a vessel you want to display in **AIS** window.
- 2 Press **MENU** and select **Display**.

Displaying AIS equipped vessel Details

- 1 Press **▲** or **▼** to select a vessel you want to display full AIS detail in the **AIS** window.
- 2 Press **↓** or press **MENU** and select **More Info**.
- 3 Press **◀** or **▶** to see more detail.

3-13-2 Poll

Poll

A compatible radio with the unit can request the position of other DSC VHF radio equipped vessels around its position. When the position of a vessel is received, the location is displayed on the screen and it is logged into Poll window

To display the **Poll** tab, press and hold **PAGE**.

Displaying an poll vessel in the chart window

- 1 Highlight a poll you want to display.
- 2 Press **MENU** and select **Display**.

Going to the poll vessel position

- 1 Highlight a poll you want to go.
- 2 Press **MENU** and select **Goto**.

Edit a distress waypoint

- 1 Highlight a poll you want to edit.
- 2 Press **MENU** and select **Edit Waypoint**.
- 3 Change data field and select **Save**.

 **Tip** : When receiving a poll from other vessel, it does not create a waypoint as a distress call

Deleting a poll

- 1 Highlight a received distress call you want to delete.
- 2 Press **MENU** and select **Delete**.

Deleting all poll

- 1 Press **MENU** and select **Delete all**.

 **Tip**: Even though you delete a DSC call, the DSC waypoints still exist.

DSC		
조선	Poll	
날짜 시간	위도 경도	MMSI 이름
01/01/2009 12:42	36° 24.000'N 129° 34.000'E	1111111111 —

4 Advanced Settings

The system menu mainly consists of settings which do not require frequent adjustment. To go to system menu, press and hold **MENU** then select the icon you want.




- ① System Configuration.
- ② Chart.(F700 Except)
- ③ Sonar.(N700 Except)
- ④ GPS.(F700 Except)
- ⑤ Track & log.(F700 Except)
- ⑥ Memory.
- ⑦ AIS.
- ⑧ Alarms.
- ⑨ Others.
- ⑩ Set Alpha blending (set transparency of menu boxes' background over main windows)



4-1 System Configuration Settings

To go to **System configuration**:

- 1 Press and hold **MENU**.
- 2 Select the **system configuration** icon.

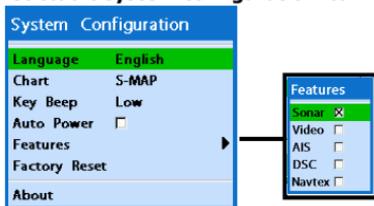

4-1-1 Language

Change the language for menus and data screens.

4-1-2 Chart Selection

Select a chart between S-MAP or NAVIONICS chart.

4-1-3 Beep volume

Select the level of beep sound.

4-1-4 Auto power

See section 3-1.

4-1-5 Features

When external devices are connected to the unit, the corresponding options need to be set.


4-1-6 Factory reset

When this option is selected. All settings of this unit returns to default factory settings.

4-1-7 About

The About window shows:
Software version and release date.
NAVIONICS version.

Wiring information of connector.

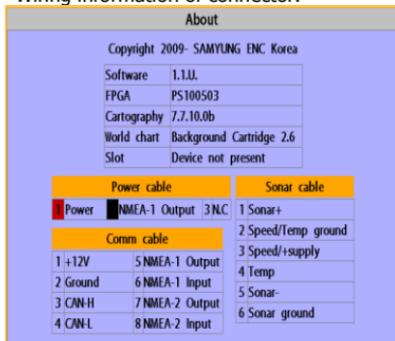



4-2 Chart Settings

To go to the chart settings:

- 1 Press and hold **MENU**.
- 2 Select the chart icon.

Chart	
Rotation	North up
Palette	Normal
General	
Land & Sea	
Map Datum	WGS84
NMEA datum offset	<input type="checkbox"/>
Map shift	Off
Restore default	

NAVIONICS

General		Land & Sea	
Plotter mode	<input checked="" type="checkbox"/>	Water features	<input checked="" type="checkbox"/>
Mixing levels	<input checked="" type="checkbox"/>	Object depths	<input checked="" type="checkbox"/>
AntiClutter	<input checked="" type="checkbox"/>	Spot soundings	<input checked="" type="checkbox"/>
Value added data	<input checked="" type="checkbox"/>	Sounding min	0 ft
Lat/Lon grid	<input checked="" type="checkbox"/>	Sounding max	10 ft
Boundaries	Auto	Tidal stream	<input checked="" type="checkbox"/>
Lat/Lon Size	Small	Land features	<input checked="" type="checkbox"/>
Names	<input checked="" type="checkbox"/>	Land elevation	<input checked="" type="checkbox"/>
Nav-aid. & Light Sector On	<input checked="" type="checkbox"/>	Security navigation zone	<input checked="" type="checkbox"/>
Nav-aid	Off		
Attention arcs	<input checked="" type="checkbox"/>		
Projected course	Off		
CDI scale	0.1 nm		

S-MAP	
Lat/Lon grid	<input checked="" type="checkbox"/>
Depth Digit	<input checked="" type="checkbox"/>
Lighthouse	<input checked="" type="checkbox"/>
Buoy	<input checked="" type="checkbox"/>
Wreck Ship	<input checked="" type="checkbox"/>
Fish Haven	<input checked="" type="checkbox"/>
Sea Lane	<input checked="" type="checkbox"/>
Restricted Area	<input checked="" type="checkbox"/>
Fishing Area	<input checked="" type="checkbox"/>
Sea Cable	<input checked="" type="checkbox"/>
Name	<input checked="" type="checkbox"/>
Mark Attribute	<input checked="" type="checkbox"/>
Sea Sector No	<input type="checkbox"/>
I.L.E. Area	<input type="checkbox"/>
Projected course Off	<input type="checkbox"/>
CDI scale	0.1 nm

4-2-1 Rotation

Three types of display presentations are provided. The default is heading up.

North up: North is at the top of the display.

Heading up: When course is set, the course is at the top of screen all the times.

Course up: When destination is set it is at the top of the screen. This option is only available when you are navigating to a destination.

4-2-2 Palette

Palettes are used to enhance the visibility of the display depending on the surrounding light environments. Four types of displays are provided; Normal, NOAA, Sunlight and Night.

4-2-3-1 General(NAVIONICS)

Plotter mode: this mode allows you to zoom in and out at scales where cartographic data are not available.

Mixing levels: when the map coverage at the current chart scale does not fill the entire display, the GPS chart plotter draws the rest of map using charts from above and below the current scale. When this function is turned on you will notice the display may redraw 2 to 3 times to show all the detail.

AntiClutter: when this option is selected, less important information (names & icons) are hidden when they are overlapped.

Value added data: The Value Added Data(VAD) is a collection of additional cartographic objects which are not present on the original paper chart. These objects have been obtained from other sources and then merged to the electronic charts in order to provide more information useful for the navigation.

Lat/Lon Grid: Turns the displaying of the latitude and longitude grid lines on or off on the chart window.

Boundaries: Turns the displaying of chart boundaries on, off or auto mode which shows the chart boundaries of the two charts below the current scale.

Text/Icon Size: change the size of text and icon on the chart.

Names: Display area names in the chart.


Nav-aids & Light Sector: Turns the presentation of Light, Signals, Buoys and Beacons On, Off, No Sector (Nav-Aids are shown, Light Sectors are hidden) or Animated (The lights are flashed).

Nav-aids: The way to display fog, radar and radio station signals. (International and US)

Attention areas: Turns the displaying of Attention Areas where need to pay attention more) On or Off.

Projected course: Display the Projected course in given set time.

CDI scale: Set CDI (Course Deviation Indicator) scale which is a parallel line on either side of the portered course.



4-2-3-2 General(S-MAP)

Lat/Lon grid: Turns the displaying of Lat/Lon on or off

Depth Digit: Turns the displaying of water depth on or off

Lighthouse: Turns the displaying of Lighthouse on or off

Buoy: Turns the displaying of buoys on or off

Wreck Ship: Turns the displaying of Wreck Ship on or off

Fish Haven: Turns the displaying of Fish Haven on or off

Sea Lane: Turns the displaying of Sea Lane on or off

Restricted Area: Turns the displaying of Restricted area on or off

Fishing Area: Turns the displaying of Fishing Area on or off

Sea Cable: Turns the displaying of Sea Cable on or off

Name: Turns the displaying of area name on or off

Mark Attribute: Turns the displaying of Mark Attribute on or off

Sea Sector No: Turns the displaying of Sea Sector No on or off

4-2-4-1 Land & Sea (NAVIONICS)

Water features: Turns the displaying of sea bed nature and tide stations icon on or off.

Object depths: Turns the displaying of object depths on or off.

Spot soundings: Turns the displaying of spot sounding on or off.

Sounding min: Set the minimum depth limit to show depth sounding, bathymetric lines and depth area.

Sounding max: Set the maximum depth limit to show depth sounding, bathymetric lines and depth area.

Tidal stream: Turns the displaying of tidal streams on or off.

Land Features: Turns the displaying of land features on or off.

Land elevation: Turns the displaying of land elevations on or off.

Safe Navigation Area: Set the water depth for safe navigation and displaying safe navigation area in color.

4-2-4-2 Land & Sea (S-MAP)

Turns the displaying of sea color in 16 different colors.

4-2-5 Map datum

This unit has a compatibility with most of major chart system and this option allows you to select a map datum. The default datum is WGS84.

Map datum Selection

- 1 Press and hold **MENU** and select chart icon
- 2 Select general and Map datum
- 3 Select a desired map datum

4-2-6 NMEA datum offset

When you select other Map datum different from WGS84, latitude and longitude will be different from WGS84'S coordinates and this might confuse other device such as VHF radio if connected to the unit. If this option is applied, latitude and longitude send on the unit NMEA output will be the same as coordinates in WGS84.

4-2-7 Map shift

Sometimes current position of own ship does not match with the current location on the chart. To correct this position error, you can apply a map shift.

Applying a map shift

- 1 In the Chart setup menu, press and hold **MENU** and select **Chart** icon.
- 2 Select Map shift to **ON**.
- 3 Move cursor to the actual position on the chart.
- 4 Press **MENU** and select **Set**.

Canceling a map shift

If you want to clear the map shift:

- 1 In the Chart setup menu, select **Map shift**.
- 2 Press **MENU** and select **Clear**.



4-2-8 Restore default

Returns every chat settings to default.



4-3 Sonar Settings

Sonar feature requires a connection to depth transducer.

To go to the Sonar settings:

- 1 Press and hold **MENU**.
- 2 Select the **Sonar** icon.

Sonar	
Frequency	50 KHz
Palette	White
Scroll speed	Fast
Digit size	Medium
Fish	
Advanced settings	
Restore default	

Fish	
Fish symbols	<input type="checkbox"/>
Fish depth labels	<input type="checkbox"/>
Fish filter	Medium
Fish sensitivity	Low
Advanced settings	
Interference filter	<input type="checkbox"/>
Noise filter	Off
Surface clutter filter	<input type="checkbox"/>
Pulse length	Auto
Pulse power	Auto

4-3-1 Frequency

You can select a sonar frequency among 200 kHz, 50 kHz or Mixed.

4-3-2 Palette

Palettes are used to enhance the visibility of the display depending on the surrounding light environments. Three types of displays are provided black, blue and white.

4-3-3 Scroll speed

You can set the scroll speed which determines how quickly the vertical scan lines run across the screen. Five speed options are provided; Very Fast, Fast, Medium, Slow and Pause.

4-3-4 Digit size

You can change the size of the depth window on the Sonar window. Three options are available Small, Medium or Large.

4-3-5 Fish

Fish symbols: Turn the fish symbol on or off.

Fish depth labels: Turn the fish depth value on or off.

Fish filter: Select a minimum fish size that will be displayed as a fish symbol.

Fish sensitivity

Select the minimum strength fish echo that will be displayed as a fish symbol.

4-3-6 Advance Settings

Interference filter: Interference from other equipment operating nearby or on your boat may show itself on the display. Use this option to remove interference.

Noise filter: If there is noise, the echo signal from transducer is not stable. This function remove noise and averages the echo signal. However, this option may also remove fish echoes.

Surface clutter filter: This filter removes surface noise. However, the function does not remove fish echoes.

Pulse length: You can select specific pulse length of transducer. A short pulse shows more detailed information but can't show deeply into the water because of less power. The Auto setting is recommended.

Pulse power: You can select specific pulse power of transducer. Low power shows a clear display but can't show deeply into the water. The Auto setting is recommended.

4-3-7 Restore default

Returns every sonar settings to default.



4-4 GPS Settings

To go to the GPS settings:

- 1 Press and hold **MEND**.
- 2 Select the **GPS** icon.

GPS	
GPS source	Internal
DGPS source	None
Static navigation	Off
Speed filter	Off
Course filter	Off
Lat/Lon d.p's	3
Ship speed	Fast
Magnetic Variation	

Magnetic Variation
Enabled <input checked="" type="checkbox"/>
Value 0.0 °E

When the GPS device is connected properly, the GPS settings provide the access to GPS functions and features connected with the satellites information used for further navigation.

4-4-1 GPS Source

Select a source of GPS signals

Internal: Select this option when uses the internal GPS antenna.

NMEA0183 & NMEA2000: Select this option when using an external GPS or DGPS antenna via NMEA.

4-4-2 DGPS Source

Select WAAS/EGNOS when you want to utilize DGPS.

4-4-3 Static Navigation

This option is very useful when the boat stops or moves very slowly. This option allows you to set a minimum speed at which movement is assumed. The value range is from 0.00 to 9.99.

4-4-4 Speed Filter and Course Filter

Occasional waves and wind at sea affect the boat speed and course. In order to have stable boat speed and course, the unit calculates these factors to give the value of stable speed and course information.

4-4-5 Lat/ Lon d.p's

Select number of last digit of Lat/Lon to be sent to other marine electronics.

4-4-6 Ship speed

To have more precise boat speed and course, you can select your boat speed. Mid is highly recommended option for the most of common boat.

4-4-7 Magnetic Variation


This option compensates the difference between true north and magnetic north.



4-5 Track & Log Settings

To go to the tracking and long settings:

- 1 Press and hold **MENU**.
- 2 Select the **track & log** icon.

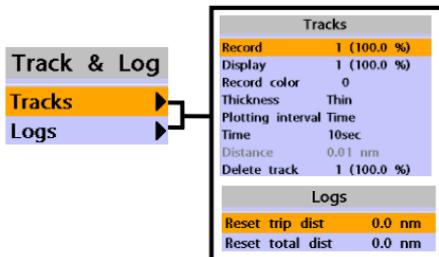

The unit has the capability to store 10 individual tracks and record up to 15,000 track points. Before using the track function you will need to setup the track function that suits your boat.

4-5-1 Track

Record

Off: Stop a recording of Track
1 to 10 (select a track number): Start a recording of the boat's course.

Display

Off: Display no track on the chart.
1 to 5 (select a track number): Display a selected track on the chart.

Record color

Select the color of recording track.

Thickness

Select the thickness of recorded track.

Plotting Interval

Select the method of plotting interval between time and distance.

Distance

Select the distance of plotting interval.

Time

Select the time of plotting interval.

Delete track

Delete a selected track record.

4-5-2 Logs

Reset trip dist

Shows you the trip distance. If you select this option it resets the trip distance.

Reset total dist


Show you the total trip distance. If you select this option it resets the total trip distance.



4-6 Memory Settings

To go to the memory settings:

- 1 Press and hold **MENU**.
- 2 Select the **Memory** icon.

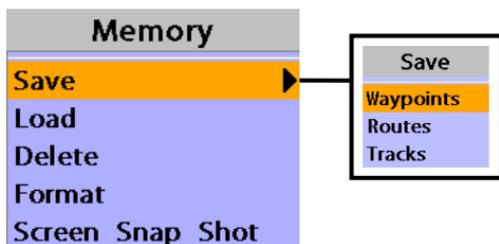

A user card is an option SD card which you need to purchase additionally.



Before you use a user card it must be formatted. Note that formatting a user card erases all saved data.

4-6-1 Save

Select a data type you want to save in the user card then the data will be saved in the user card automatically.

- 1 If you select waypoint for saving data, enter the file name and press **↓**.
- 2 If you select routes for saving data, enter the file name and press **↓**.
- 3 If you select tracks for saving data, enter the file name and press **↓**.

[Waypoints]

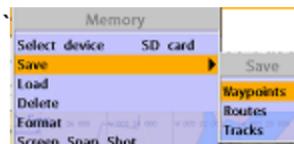

[Tracks]

4-6-2 Load

Select a data you want to load into the load list then press **↓**.

Name	Type	Time
FILE01	Waypoint	00:00 01/Jan/09
FILE02	Tracks	00:00 01/Jan/09
FILE03	Waypoint	00:00 01/Jan/09
FILE04	Waypoint	00:00 01/Jan/09
FILE05	Waypoint	00:00 01/Jan/09

Slot1:1MB 25.9% Used

Wpts	Tr.1	Tr.2	Tr.3	Tr.4	Tr.5	Tr.6	Tr.7	Tr.8	Tr.9	Tr.10
Route	5	Tr.4	0	Tr.8	0					
Tr.1	4177	Tr.5	0	Tr.9	0					
Tr.2	0	Tr.6	0	Tr.10	0					

4-6-3 Delete

Select a data you want to delete then press **↓**.

(Press **MENU** and select **sort by name**. Also, you can sort the file by name.)

Name	Type	Time
FILE01	Waypoint	00:00 01/Jan/09
FILE02	Tracks	00:00 01/Jan/09
FILE03	Waypoint	00:00 01/Jan/09
FILE04	Waypoint	00:00 01/Jan/09
FILE05	Waypoint	00:00 01/Jan/09

Slot1:1MB 25.9% Used

Wpts	Tr.1	Tr.2	Tr.3	Tr.4	Tr.5	Tr.6	Tr.7	Tr.8	Tr.9	Tr.10
Route	5	Tr.4	0	Tr.8	0					
Tr.1	4178	Tr.5	0	Tr.9	0					
Tr.2	0	Tr.6	0	Tr.10	0					

4-7-1 Display filter

There are a couple of methods to filter AIS vessel in this unit as below.

Filter by Type : The type of vessel which is selected will not be displayed on the chart.

Filter by distance : Vessels outside the radius of selected distance from own ship is filtered.

Filter by speed : Vessels with speed below the set value are filtered.

Show Dangerous Only : When this option is selected, it shows dangerous vessel only.

4-7-2 Alarm option

Dangerous Vessel Alarm : When this option is selected an alarm will activate. Even this option is not selected; dangerous vessels will still be on the chart.

TCPA Limit : Set the Time of Closet Point of Approach limit.


CPA Limit : Set the Closet Point of Approach limit.

Proximity alarm : Trigger an alarm when any AIS equipped vessel is within a set proximity radius.


Proximity radius : Set a radius for proximity alarm.

4-7-3 Display options

Projected course : Set a time for projected course. The project course show the estimate course of vessel base on the given time.

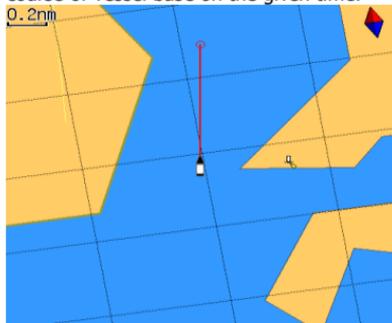

Range rings : Select a number of Range rings.

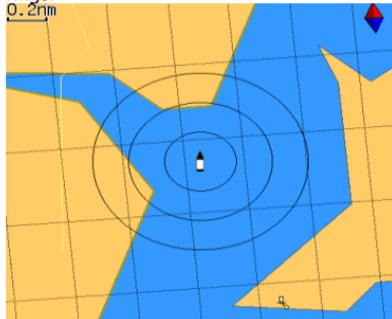


4-7-4 Restore default

Returns every AIS setting to default.



4-8 Alarms

Press and **MENU** then **Alarms**:

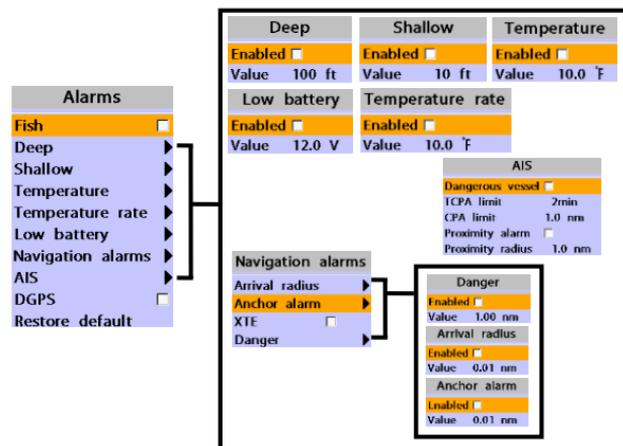

A warning message with beep sound is displayed when an alarm condition is met by user setting. Press **ESC** to clear the alarm. However, the alarm will be displayed again when the alarm condition occurs again. The unit provides alarms for various functions.

4-8-1 Fish

Trigger an alarm when echo from the transducer is matched to preprogrammed fish profile.

4-8-2 Deep

Trigger an alarm when the depth value received from the transducer is deeper than a set value.

4-8-3 Shallow

Trigger an alarm when the depth value received from the transducer is shallower than a set value.

4-8-4 Temperature

Trigger an alarm when the reported temperature from the transducer is same as a set value.

4-8-5 Temperature rate

Trigger an alarm when the rate of temperature change from the transducer is same as a set value.

4-8-6 Low battery

Trigger an alarm when battery voltage is lower than a set value.

4-8-7 Navigation alarms

Arrival radius : Trigger an alarm when your boat is approaching the destination to set value

Anchor alarm : Trigger an alarm when your boat moves more than set valve

XTE : Trigger an alarm when your boat moves off the current CDI scale.

Danger : Trigger an alarm when your boat is getting closed to dangerous point.

4-8-8 AIS

See the Alarm option of 4-7 (AIS Settings).

4-8-9 DGPS

Trigger an alarm when DGPS signal is not received.


4-8-10 Restore default

Returns every alarm settings to default.



4-9 Others

Press and **MENU** then **Others**:

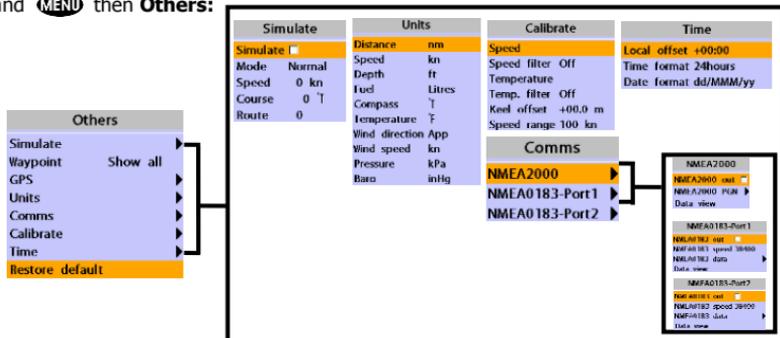

4-9-1 Simulate

Simulate : Turn the simulate mode on or off.

Mode : See 2-4 Simulate Mode.

Speed : The simulated boat speed to use.

Course : The simulated course over ground.

Route : The route to follow.

4-9-2 Waypoint

Select a way to display waypoints.

4-9-3 GPS

See 4-4 GPS Settings.

4-9-4 Units

Select a unit of each measure.

Tip: Requires a optional VHF receiver with barometer connected: InHg or mB.

4-9-5 Comms

Use this feature when the unit is connected to other marine electronics through any compatible NMEA instrument.

NMEA0183/NMEA2000: This option to transmit NMEA sentences to other marine electronics. NMEA0183 and NMEA2000 interfaces are generally used with third party marine electronics. Select a port (NMEA2000, NMEA0183-Port 1 or NMEA0183-Port 2), a communication speed and select a desired output data.

4-9-6 Calibrate

Speed : Calibrate the boat speed. Travel at a constant known speed and press or to calibrate the speed.

Speed filter : Set this option when removing effects from waves and wind which affect the speed of boat by averaging.

Temperature : Calibrate the water temperature. Measure the water temperature with thermometer then press or to calibrate the temperature.

Temperature filter : Set this option when removing effects from water turbulence and currents cause the water temperature to fluctuate slightly.

Keel offset: A depth measured by a transducer is depending on where the transducer is installed. You can adjust the depth of water in consideration of depth of transducer installed in the water.

Speed range: Set a maximum speed of boat that can be read in the unit.

4-9-7 Time

Local offset : The time information supplied by the GPS satellites is in UTC (Universal Time Coordinates). To read the correct time, change the time of GPS chart plotter for daylight saving time start and end.

Time format : Select the format of time.

Date format : Select the format of date.

4-9-8 Restore default

Returns every other setting to default.

4-9-9 Calendar

Provide a calendar function.

5 INSTALLATION


Correct installation is important to the performance of the unit. It is vital to read the entire installation section of this manual and the documentation that comes with the antenna and any other units before starting installation. For further information, please contact Samyung ENC.

5-1 Options and Accessories


Optional sensors and instruments

- External alarms
- GPS or DGPS antenna
- Sonar transducer
- Fuel sensors
- DSC VHF radio
- NMEA 2000: The chart plotter can display engine data and.
- Other instruments: The chart plotter can receive data from other instruments and send data to other instruments by NMEA.

Connections

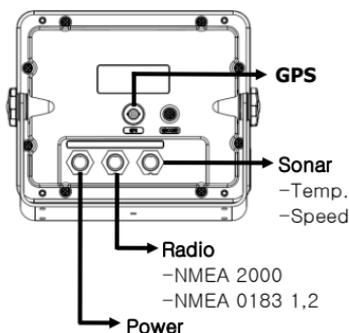

[Pin number]

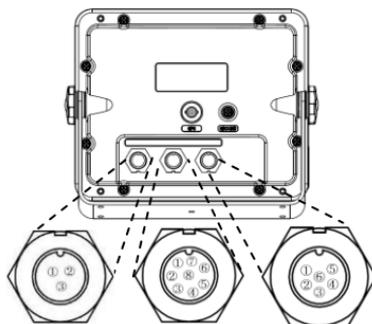

[Power]

Pin No.	Detail
1	+ power input, 10 to 34 V DC
2	GROUND: - POWER INPUT
3	Not use

[Sonar]

Pin No.	Detail
1	SONAR +
2	SONAR / TEMP. , GND
3	SPEED / + POWER SUPPLY
4	TEMP.
5	SONAR -
6	SONAR GND

[Radio]

Pin No.	Detail
1	+ 12 V DC
2	GND (COMMON)
3	NMEA 2000 H
4	NMEA 2000 L
5	NMEA 0183-1 OUTPUT
6	NMEA 0183-1 INPUT
7	NMEA 0183-2 OUTPUT
8	NMEA 0183-2 INPUT


5-2 Connections

The GPS chart plotter has connectors that are used to connect to the power supply, GPS antenna and to NMEA devices such as VHF's AIS receivers, digital instruments and autopilots.


5-3 Power/data cable

Basic power

- Wire the display unit for basic power as below picture.



Power cable

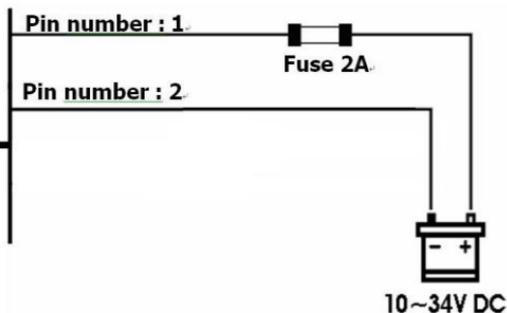


5-4 GPS antenna

5-4-1 antenna

Installing a antenna

install the antenna and fit the antenna cable back to the display unit. Follow the instructions in the manual supplied with the antenna. Fit an optional extension cable if required.

During setup, configure the data for the chosen antenna.

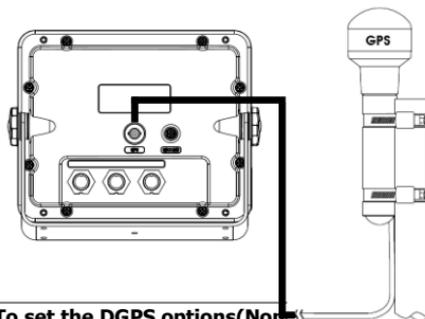

5-4-2 The antenna using NMEA

The chart plotter can receive the GPS data from the compatible device (NMEA). The chart plotter can connect several devices to an external GPS.

- An optional differential beacon DGPS antenna to give enhanced accuracy within range of land based differential beacons in areas where WAAS or EGNOS are not available. Such a DGPS antenna has both a GPS receiver and a beacon receiver, and it automatically applies the beacon correction to the GPS position.

To set the DGPS options(Non WAAS/EGNOS):

Connect the GPS directly to the input. Set the option. The new setting will be displayed if it was successfully applied.

Note:





The chart plotter can apply the WAAS and EGNOS DGPS corrections to any GPS antenna.

For more information, contact Samyung ENC.

5-5 NMEA 0183

The GPS chart plotter can be connected to external devices with NMEA0183 and display information such as followings.

- DSC VHF Radio
- GPS antenna(NMEA 0183)
- Navtex
- AIS receiver

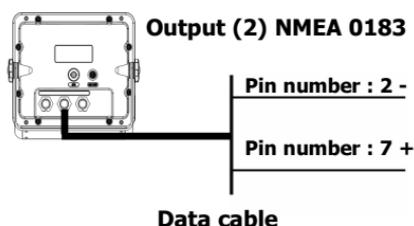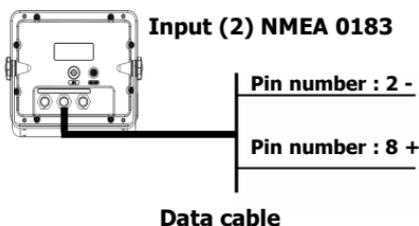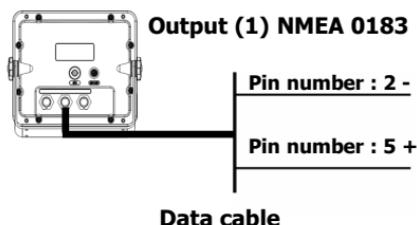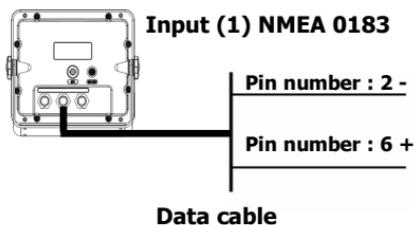

DSC VHF radio

Fit and set up the optional DSC VHF radio as above Pictures: NMEA 0183(1) IN and NMEA 0183(2) IN.

Other NMEA instruments

NMEA is an industry standard for interconnecting instruments. The chart plotter can be connected to other NMEA instruments. Set up the optional NMEA instruments as above pictures.

- The chart plotter can receive and display depth, paddlewheel boat speed and water temperature from an optional compatible instrument.
- The chart plotter can receive data from an optional compatible GPS or GPS/DGPS source.

- The chart plotter can send GPS position and other navigation data to an autopilot or other instrument. An autopilot requires APB, APA and VTG sentences. For information on sending NMEA data to the instrument, contact Samyung ENC.

During setup to send NMEA data to other instruments, set NMEA out and specify the NMEA data to send.

5-6 NMEA 2000

NMEA 2000 interface standard was introduced for communications network to interconnect marine electronic equipments such as navigation chart plotter, engine, tank level sensor and others on vessels. The standard is regulated by The National Marine Electronics Association in USA.


The chart plotter can be connected to external devices with NMEA2000 and display information such as followings.

- Engines have fuel flow sensors, therefore fuel sensors are not required.
- The chart plotter can receive and display wind speed and direction from an optional compatible wind instrument.

- The chart plotter can receive and display depth from an optional depth instruments.
- The chart plotter can receive and display boat speed and water temperature from a paddlewheel sensor on a optional speed instrument.

If connected display unit, use the cable compatible with NMEA 2000 standard.

NMEA 2000

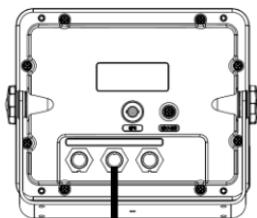

Data cable

Pin number : 1 DC +12V

Pin number : 2 DC -


Pin number : 3 H

Pin number : 4 L

5-7 Sonar Transducers


The transducer is a sensor that transmits and receives sound waves into the water.

- Fit the sonar transducer supplied, following the instructions in the Transducer Installation Manual supplied with the chart plotter.
- In case of installation of 50/200KH transducer, water speed sensor and water temperature sensor, an optional through hull dual frequency sonar transducer and through hull speed/temperature transducer provide more enhanced performance. Contact Samyung ENC for more information.
- Connect the transducer to the chart plotter.
- At the system configuration window, set Sonar to and set up the sonar options



Sonar cable

If you use Y-Cable, the chart plotter can display water temperature and water speed from the compatible devices and receive and display the depth from transducer. To connect these instruments, please connect the cable to the unit as the below picture.



Sonar Cable

Pin No.	Detail
1	TD 1
2	Shield
3	
4	
5	TD 2
6	Shield

Transducer



Temp./Speed



Pin No.	Detail
1	Shield
2	Speed supply
3	GND (Shield)
4	TEMP.
5	
6	Speed
7	
8	

5-8 Setup and test

- 1 Put a blanking cap on any unused connector on the back of the display unit. Ensure all connectors are plugged in and the display unit is in place.
- 2 If the display unit is bracket mounted, adjust tilt and rotation for best viewing and hand tighten the knob.
- 3 Insert any required NAVIONICS chart card.
- 4 Enter setup data to set up the chart plotter to your requirements and to set up any optional sensors or instruments.
- 5 At the satellite display, check that it picks up GPS satellites. Wait for the GPS receiver to start up and the GPS satellite to change to 'Used in fix'.



Thank you for purchasing an SAMYUNG ENC product. This product has been thoroughly checked and is covered by the **Samyung ENC's warranty** for defects in materials and workmanship under normal use from the date of purchase.

This warranty provides for the free repair or replacement of defective parts from our Samyung ENC authorized dealer.

In the event that your SAMYUNG ENC product needs service, please return your SAMYUNG ENC product at your expense (shipping and insurance) to your Samyung ENC distributor or SAMYUNG ENC authorized Service Centers. SAMYUNG ENC will, at its discretion, repair or replace any defective products or its components at no cost to you. This is your exclusive remedy for defective products

Exclusions: are specifically excluded from warranty;

1. Consumable items, including, but not limited to: fuses, impellers, impeller bearings, impeller shafts are specifically excluded from this warranty. . .
2. All costs associated with transducer replacement, other than the cost of the transducer itself.
3. Routine system checkouts, alignment and calibration, seatrials, unless required by replacement of defective parts.

Limited warranty: SAMYUNG ENC will not be responsible for equipment that has been damaged or rendered defective:

1. as a result of incorrect installation, misuse, accident, water damage, abuse or other external causes
2. by modification or service other than by SAMYUNG ENC or authorized distributors, authorized Service Centers. SAMYUNG ENC will not be liable in any event for any consequential or indirect loss or damage. Exceptions are expressly set out in this warranty, SAMYUNG ENC makes no other warranties, express or implied, including any implied warranties of merchantability and fitness for a particular purpose. If any limitation or exclusion of liability in this warranty is invalid and SAMYUNG ENC becomes liable for loss or damage that would otherwise have been excluded, such liability will be limited to the total amount actually paid by you for the product.
3. if the serial number label on the unit has been removed, altered or mutilated



SAMYUNG ENC

www.samyungenc.com

 **SAMYUNG ENC Co.,Ltd.**

Head Office : 1123-17, Dongsam-Dong, Youngdo-Gu, Busan, Korea, 606-083 Tel : 82-51-601-5530(Rep.) Fax : 82-51-413-4446
A/S Center : 65-20, 2-Ga Namhang-Dong, Yungdo-Gu, Busan, Korea, 606-032 Tel : 82-51-601-5570-4(Rep.) Fax : 82-51-416-5515